




# HISAKA "pH Control System"

- Control Device (HAC) simultaneously controls pH and Temp.
- Control Device (HAC) contributes to reproductivity improvement of Nylon Acid Dyeing which highly depends on pH condition.

## System Overview

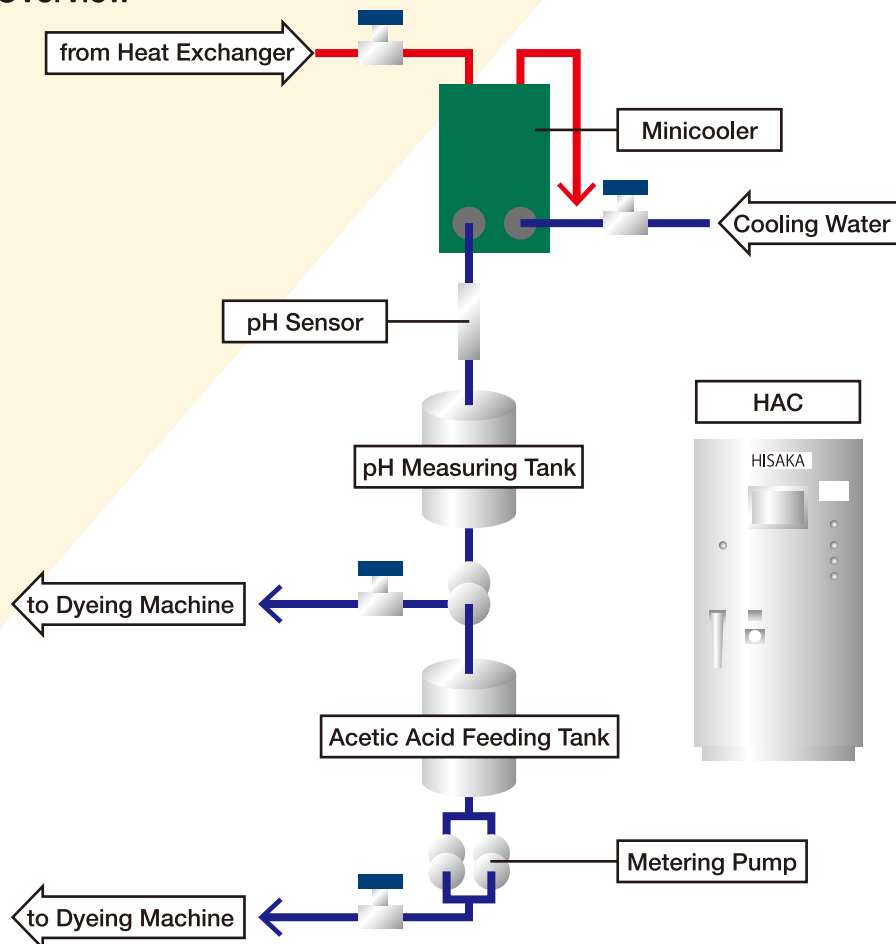

Control Device (HAC) controls pH value with continuously detecting the current pH value. The feeding volume and speed of Acetic Acid are controlled by Metering Pump.

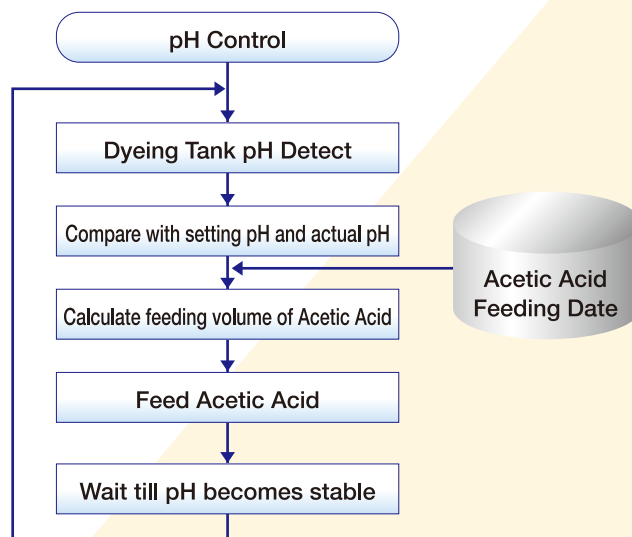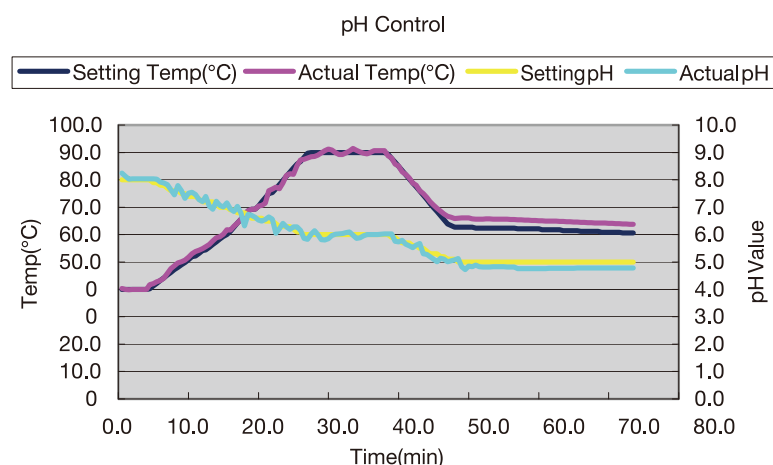

**HISAKA WORKS, LTD.** Process Engineering Division

Dyeing & Finishing Machinery / Ikoma Plant: 8916-10, Takayama-cho, Ikoma City, Nara 630-0101 Japan TEL : +81-743-25-2902 FAX : +81-743-25-2912  
<https://www.hisaka.co.jp/english/textile/>

