


Online Simulator

HISAKA Web-Simulator (HWS)

This is the first plate heat exchanger design website opened on the Internet in the world.
Access the URL below and click on the Web-Simulator icon.

You can simulate the plate heat exchanger perfect for your needs, any time of the day, from anywhere.



http://www.hisaka.co.jp/simulator_english/

Quotation Request by FAX

Osaka - FAX: +81-6-6363-0161

If necessary to help for selection of Plate Heat Exchanger, please fax the form below to us.

1. Heat duty	kW	
	Hot side	Cold side
2. Fluid name		
3. Inlet temperature	°C	°C
4. Outlet temperature	°C	°C
5. Flow rate	m ³ /h	m ³ /h
6. Pressure loss	MPa or less	MPa or less
7. Maximum working pressure	MPaG	MPaG
8. Special notes Plate materials, gasket materials, etc.		

HISAKA WORKS, LTD. Heat Exchanger Div.

Sales Department

Osaka Sales Section : 2-12-7 Sonezaki, Kita-ku, Osaka City,
Osaka 530-0057 Japan
TEL: +81-6-6363-0020 FAX: +81-6-6363-0161

Tokyo Sales Section : 1-19-8 Kyobashi, Chuo-ku,
Tokyo 104-0031 Japan
TEL: +81-3-5250-0760 FAX: +81-3-3562-2760

Nagoya Sales Section: 1-12-17 Sakae, Naka-ku, Nagoya City,
Aichi 460-0008 Japan
TEL: +81-52-217-2491 FAX: +81-52-217-2494

Customer Service : 2-1-48 Higashi-konoike-cho, Higashi-Osaka City,
Osaka 578-0973 Japan
TEL: +81-72-966-9601 FAX: +81-72-966-8923

URL: <http://www.hisaka.co.jp/english/phe/>

The Thermal Solution Company


Using plate type heat exchangers as our core technology, HISAKA WORKS provides thermal solutions to our customers all over the world.

“HISAKA WORKS, LTD., Heat Exchanger Division” is ISO9001 and ISO14001 certified.

No part of this brochure may be used, cited, or altered for any purpose or reproduced in any form without the prior written permission of the copyright holder. All product details, including appearance and specifications, presented in this brochure are subject to change for improvement without prior notice.

Agent

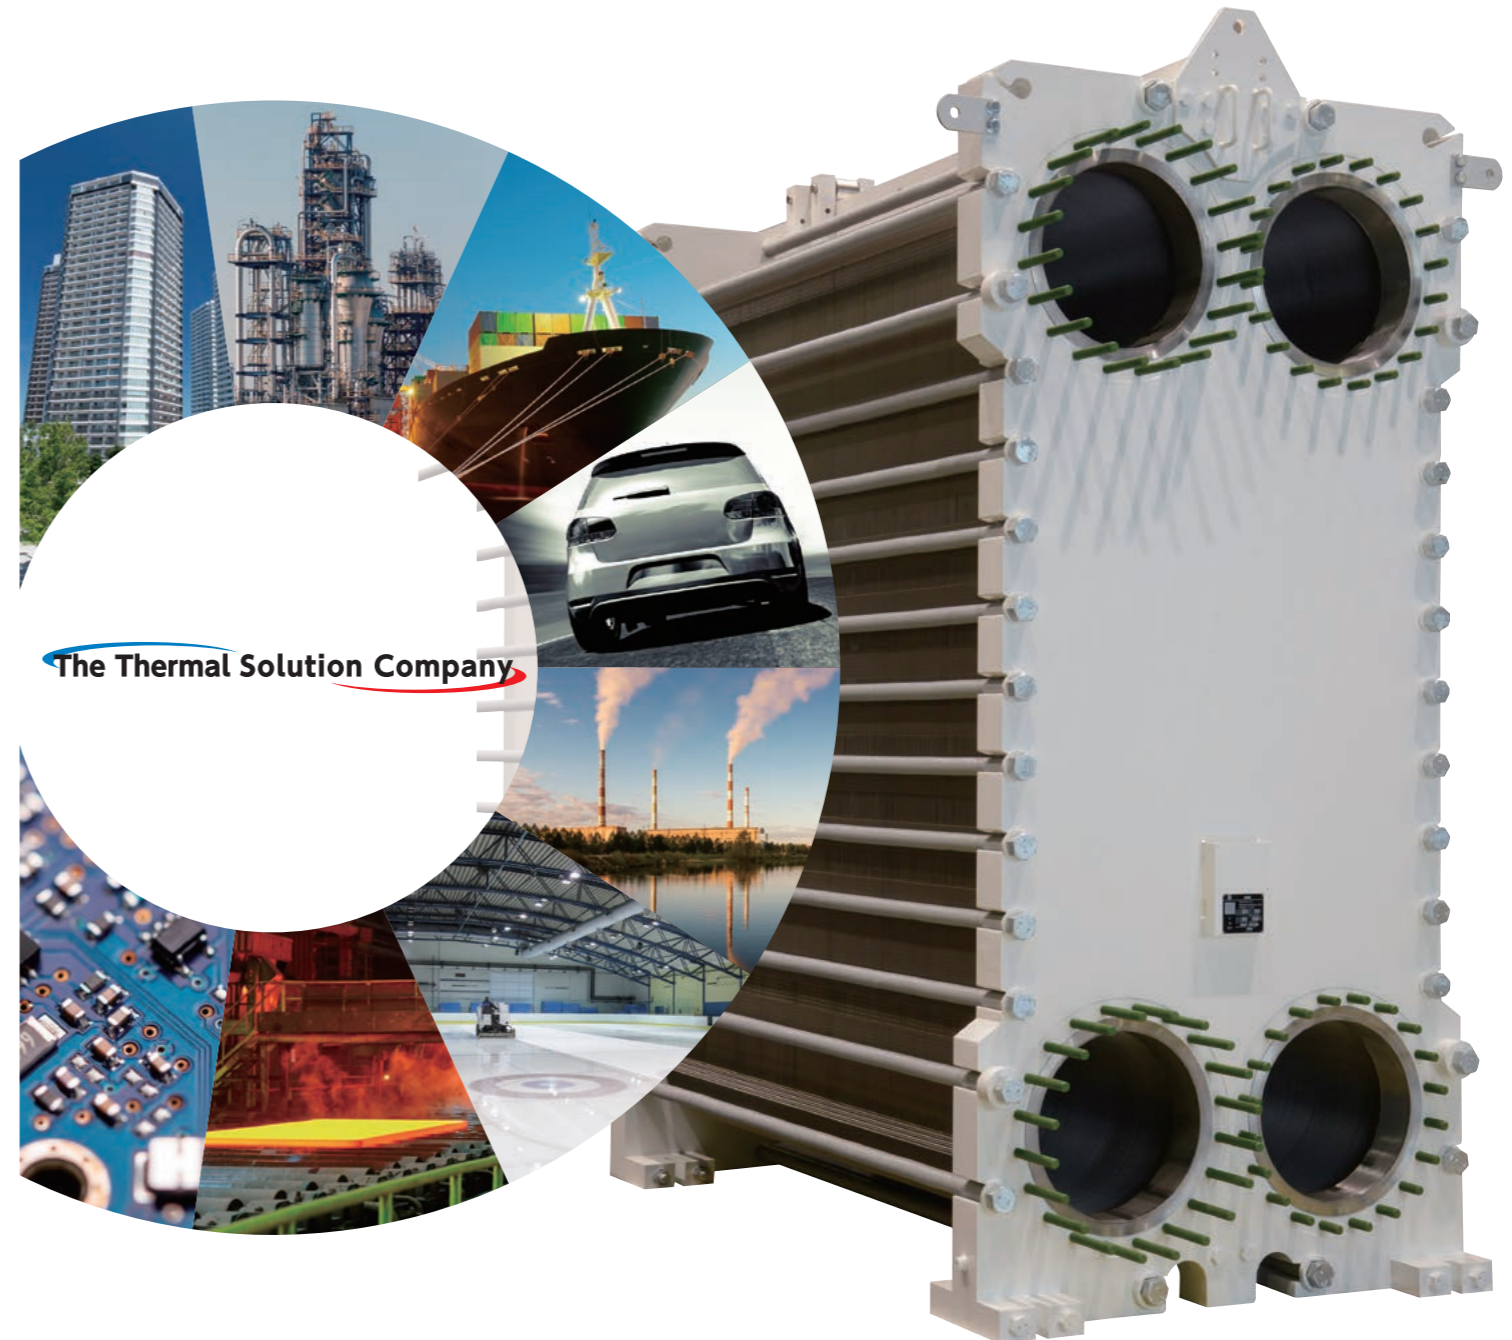Plate Heat Exchanger



HISAKA

The Thermal Solution Company

Using plate type heat exchangers as our core technology, we provide thermal solutions to our customers all over the world.



HISAKA WORKS / Konoike Plant



HISAKAWORKS S.E.A. (Malaysia)



HISAKA WORKS (CHINA) CO., LTD. (China)



UX-160, one of the largest plate heat exchangers in the world

**Use it "surely."
Use it "more."
Use it "longer" into the future.
HISAKA continues to supply reliable plate heat exchangers.**

HISAKA WORKS, LTD. is the largest plate heat exchanger manufacturer in Asia. By manufacturing and selling plate heat exchangers used in applications such as heating, cooling, sterilization, pasteurization, heat recovery, and condensation in various industrial processes for chemicals, food, air conditioning, marine, pulp and paper, steel / metal and automobile and related. We contribute to the effective use of resources and the improved efficiency of production facilities. We are also actively engaged in overseas expansion. We have established network in Malaysia, Thailand, Singapore, China, South Korea, Indonesia, Vietnam, the Philippines, and Saudi Arabia, and also provide technology to ARSOPI THERMAL (Portugal).



40,000 ton press, one of the largest in the world



Fully-automated 20,000 ton press



High-speed, automated 4,000 ton press

Design Plate Heat Exchangers Online

Since we delivered our first domestically-produced device in 1953, HISAKA plate heat exchangers have been used in all kinds of industries as compact heat exchangers with maximum efficiency. In order to meet more diverse and more sophisticated needs, we have arranged a rich variety of models, from small models of 0.18 m²/unit to large models up to 3,400 m²/unit.

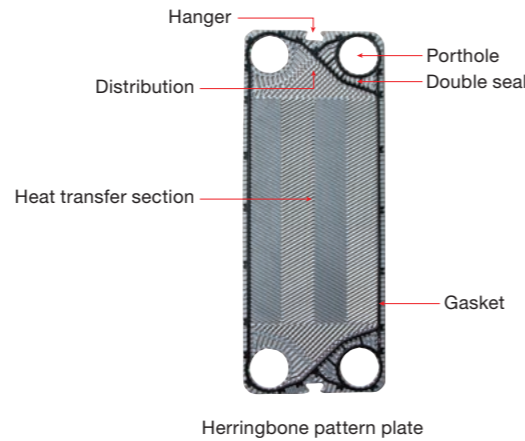
Basic Structure

Heat transfer plates are made by pressing thin sheets of corrosion-resistant metal such as stainless steel or titanium, then set them with seal gaskets and hang and pile them on the guide bar. Then, plates are tightened with bolts between the fixed frame and the movable frame. Here, there is a certain gap between the heat transfer plates that allows liquid to flow. The liquid inlets and outlets are in the fixed frame or the movable frame.




Heat Transfer Plate


Each heat transfer plate is corrugated to various patterns to increase its strength and surface area. Furthermore, the corrugation makes high turbulence and thereby achieves high heat transfer coefficient. Portholes are formed in the plate's four corners. The gasket is set into the groove around the plate edge to seal in the fluid. (Refer to P7.)



Flow Channel of Fluid

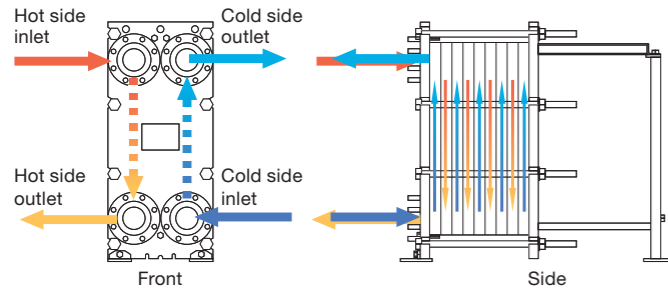

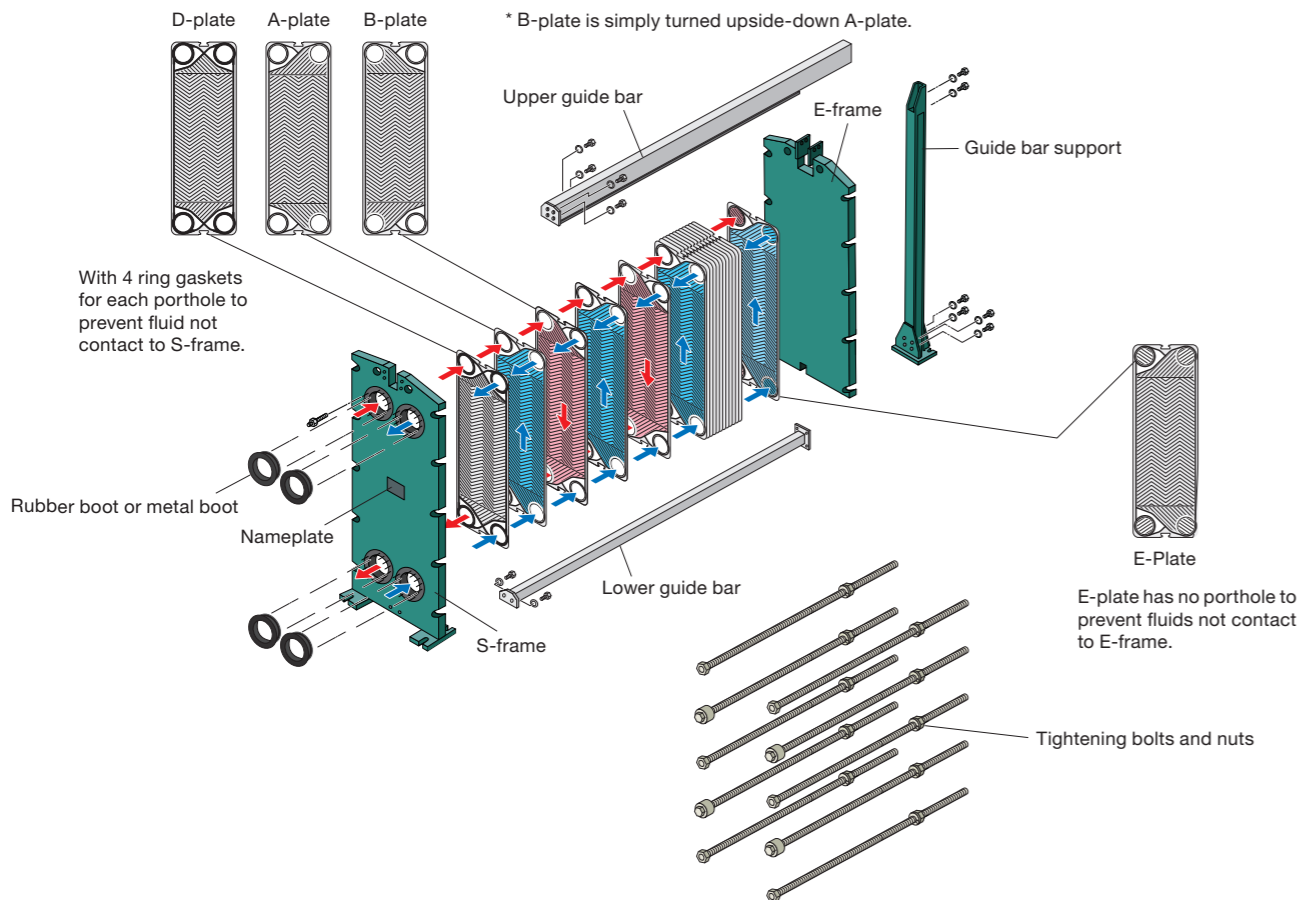Structure of a Plate Heat Exchanger (PHE)



Standard Operational Data

Processing capacity: 0.1 m³/h to 7,300 m³/h
 Working pressure: max. 4.0 MPaG
 Working temperature: max. 180°C
 Heat transfer area: 0.18 m²/unit to 3,400 m²/unit
 Plate material:

- Stainless steel: 304, 316, 315J1, 317, Etc.
- Titanium: TP270, TP270-Pd
- High nickel alloy: C-276, C-22, B, G
- Nickel: NNCP, NLCP
- Other: Domestic and international standard materials

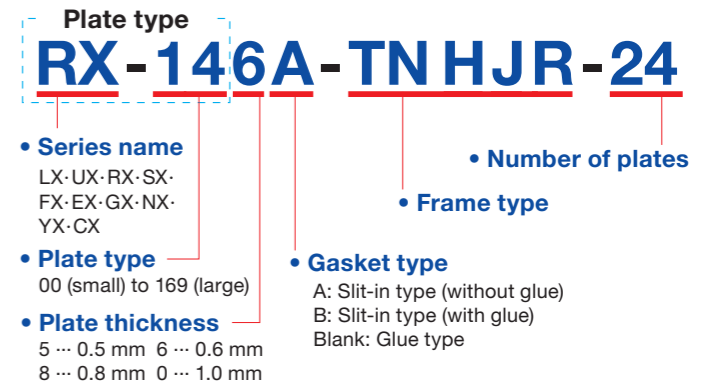
Gasket materials:

- NBR, IIR, EPDM, FPM, Silicon,
- TCG (PTFE cushion gasket)

* The above data varies depending on the model, material, plate thickness, and operating specifications.

PHE Model Numbers

The plate type, thickness, and number, and the frame type for HISAKA PHEs are indicated as below.



Pressure Vessel Code and Standard

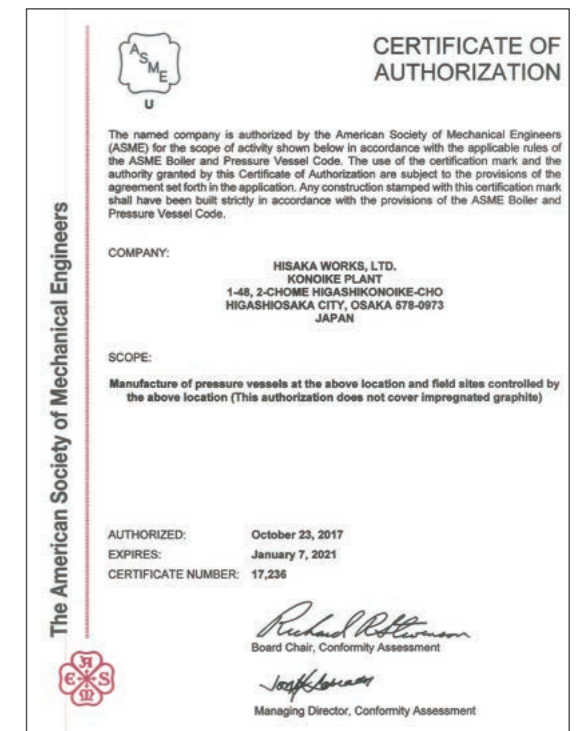
Our company can design and manufacture plate heat exchangers subject to the following regulations and applications. As certain applications may not be possible depending on the model, material, plate thickness, and other factors, please be sure to inquire with us if regulations may apply.

Overseas Standards

ASME U STAMP

We can design and manufacture plate heat exchangers in compliance with ASME (American Society of Mechanical Engineers standard).
 ASME Boiler and Pressure Vessel Code, Section VIII, Division 1.


Note: As the design temperature may be subject to restrictions depending on the aforementioned plate material, plate thickness, and gasket materials, please be sure to inquire with us.



Features


High Performance

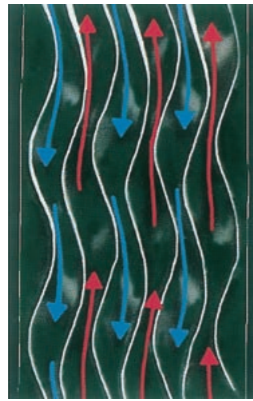The overall heat transfer co-efficient (U-value) ranges from 4,000 to 9,000 W/m² · °C in water application, since the plate corrugation provides a highly turbulent flow. This is one of the reasons why plate heat exchangers have such a high heat transfer coefficient. In addition, this turbulent flow also acts to prevent scales on the plate surface.




Smaller Footprint

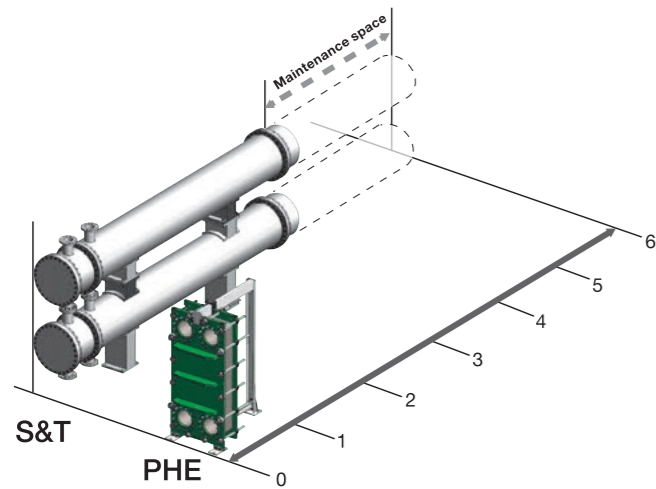The lightweight and compact construction reduces the installation space to 1/3 and the weight to 1/10 of S&T (shell & tube heat exchangers), respectively. In addition, the lightweight and thin heating plates and less liquid hold facilitate the installation work. The Plate Heat Exchanger can be disassembled for cleaning without piping work, while the S&T heat exchanger needs additional space for drawing out the tube bundle.



The terminal temperatures difference up to the limit.

The construction which permits heat exchanging in a perfect counter-current flow with very efficient heat transfer makes it possible to approach a temperature difference between the hot and cold fluids of 1°C or less.



Line up

We have a rich variety from small to large plate heat exchanger. You can select the most suitable type for your specification requirements.

Easy Maintenance

Loosening the tightening bolts allows for simple disassembly. The heat transfer plates can be easily inspected visually, and cleaning is easy.

Steam available as the heat source

The use of a synthetic rubber gasket with a special composition enables the use of steam as a heat source, that is, an operating temperature range up to 180°C.

Minimal heat radiation

Heat radiation from plate pack is blocked by the gasket, with only a minimal amount of heat radiation from the thin fin-shaped edge. Also, as the front and rear of plate pack is connected to the frame of each through an air layer, the heat radiation is minimal. Except in cases with an extremely small number of plates, it is less than 1% of the heat exchange amount.

Short delivery time

We have a stock of plates in standard materials (SUS304 / 316 and TP270) and have standardized the construction to achieve short delivery time. However, regarding special materials such as high nickel alloy, NNCP, TP270-Pd, and the like, please inquire.

Prevention of Liquid Inter-mixing

Special consideration is taken for the gasket so as to protect it from direct contact with the liquid. Furthermore, the gasket is a double-seal type so as to permit liquid draining outside the exchanger even in a case of a liquid leak caused by its deterioration.


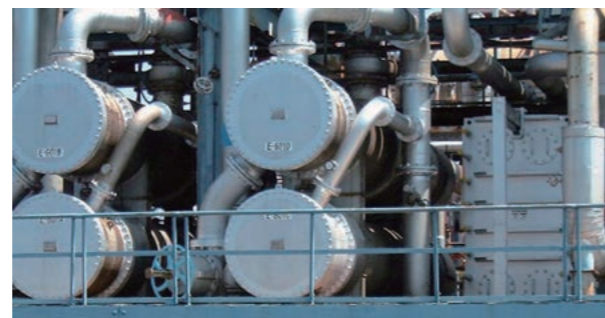



Plate Element Types

The plates are specially selected from various patterns so as to achieve optimum heat transfer area and cost effective heat exchanger type for each requirement. These plates include the corrugated pattern EX and FX series, the herringbone pattern RX, UX, LX, SX, and CX series, and the specific pattern GX and YX series.

Corrugated Pattern

The corrugated pattern is also called the wash board pattern. It has less metal contact points between plates and allows for even liquids with fiber or sludge contents to flow easily without blockage. The FX series was developed exclusively for food application even beyond the conventional corrugated pattern. (Refer to P16)




Corrugated

Herringbone Pattern


The "herringbone" pattern was named as the V-shaped press grooves resemble the bones of a herring. There are numerous contact points by pilling the V-shaped pressed plates, turning them 180° in an alternating pattern. This ensures high pressure resistance, and also the complex flow channels formed by the V-shaped press grooves get high heat transfer performance. Furthermore, including the decreased heat transfer resistance due to the thinner plate results in heat transfer performance three to five times higher than that of S&T heat exchangers. A herringbone pattern with a W-shaped press groove is called a "double herringbone" and is an improved version of the V-shaped herringbone. The "lightning herringbone" is a herringbone for higher NTU duty.



Single herringbone



Double herringbone



Lightning herringbone



Pressing depth Deep ← → Shallow
 Pressing pitch Big ← → Small
 NTU Low ← → High

Specific Patterns

In addition to the above plates, we also develop high-functionality plate patterns, such as multi-gap, exclusive condensation use.


NTU (θ)

NTU = 3 is heat recovery performance of 75%

The heat transfer characteristic of each plate are expressed using NTU (Number of Transfer Unit, θ) and are defined as follows.

$$\theta = U \cdot A / G \cdot C_p = \Delta t / \Delta t_{lm}$$

U: Overall heat transfer coefficient
 A: Heat transfer area
 G: Flow rate of the fluid
 Cp: Specific heat of the fluid
 Δt: Temperature change of one fluid
 Δt_{lm}: Logarithmic mean temperature difference between Δt1 and Δt2




As heat recovery ratio η is expressed as $\eta = \frac{\Delta t}{\Delta t + \Delta t_{lm}}$

when Δt1 = Δt2 (= Δt_{lm}), θ is $\eta = \frac{\theta}{\theta + 1}$.
 Therefore, for a plate where θ = 3, $\eta = \frac{3}{3 + 1} = 0.75$,


which means it has a heat recovery performance of 75%.

Plate Patterns and NTU

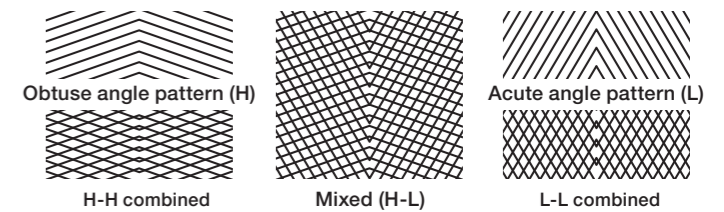There are two types of herringbone pattern plates; one where the V (W) angle is obtuse (H-plate), and one where it is acute (L-plate). Combining H-plates and L-plates can allow for three types of different flow channels; H-H, H-L, and L-L. Our optimal design method which combines plates, known as the "mixed arrangement," can decrease the heat transfer area by approx. 25% compared to designs with a single plate.



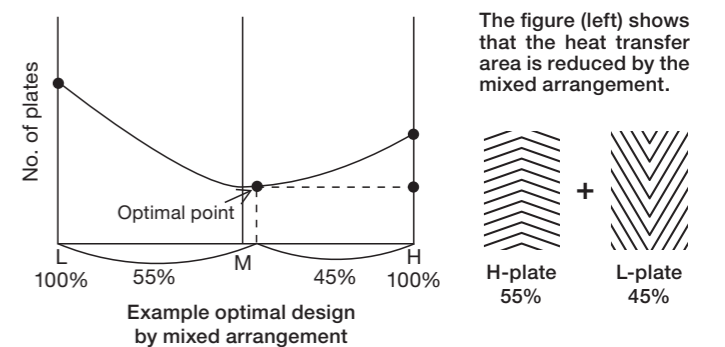NTU High ← → Moderate ← → Low
 Pressure loss Big ← → Moderate ← → Small



This case shows a mixed arrangement wherein there are 55 H-plates and 45 L-plates for a total of 100 plates. Two plates form one channel, so there are 45 M channels (H-L) and 5 H channels (H-H). The number of plates is significantly reduced compared to a case with only H channels case.

Gaskets

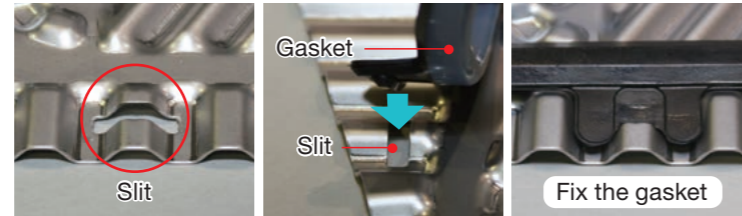
Gaskets used in plate heat exchangers must have durability in various liquid qualities and temperature / pressure conditions. Hisaka has prepared the following gasket materials in order to support a wide variety of applications.

Standard material: NBR, EPDM (ethylene propylene rubber), IIR (butyl rubber)
Special material: FPM (fluororubber), silicon, PTFE cushion gasket

1. Slit-in Gasket (Glue-free type)

These plate gaskets do not need glue. The slit-in gasket is especially recommended for those applications where frequent replacement of the gasket is required. Further, without the glue, glue odor is reduced. The slit-in type gasket is suitable for applications such as water treatment or food processing. (D-plate gaskets and distance piece gaskets use glue. Also, some plates do not support slit-in gaskets.)


Installation of Slit-in Gaskets



2. NEW-EPDM (N-EPDM)

Usually, EPDM gasket is selected either for high temperature or aggressive fluid applications. Although EPDM gaskets are high quality, rubber gaskets lose elasticity as time passes. A cutting edge N-EPDM gasket, newly developed by Hisaka, was introduced. The N-EPDM gasket improves both the heat and chemical resistance. The life-time is two times higher than conventional EPDM. Originally invented specifically for the CO₂ chemical recovery process, the N-EPDM is useful for other applications with many advantages.

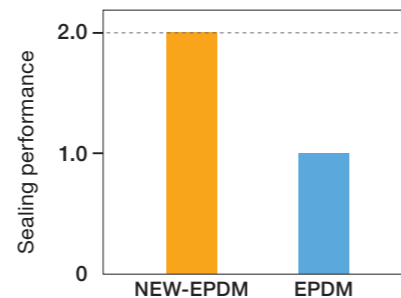Life time of NEW-EPDM and EPDM (180°C)




The above compares the sealing performance of the conventional EPDM and the NEW-EPDM. The NEW-EPDM can realize a better heat resistance compared to the conventional EPDM and achieves long time operation.


3. PTFE Cushion Gaskets (TCG)

Through our own development, HISAKA has pioneered PTFE Cushion Gaskets for the Plate Heat Exchanger. It is normally used in applications where conventional synthetic rubber would have limitations due to the corrosiveness of the fluid being handled. With this new development, the Plate Heat Exchangers can be applied in a wider variety of applications than before due to the chemical resistance and the durability of PTFE. Due to the elastic core of the TCG gasket, it does not require strong tightening torque during the assembly of the unit. Thus, it reduces the risks of plate deformation by over tightening. A TCG gasket can be used for one side only, if the noncorrosive fluid is running in the other side where a conventional gasket can be used.

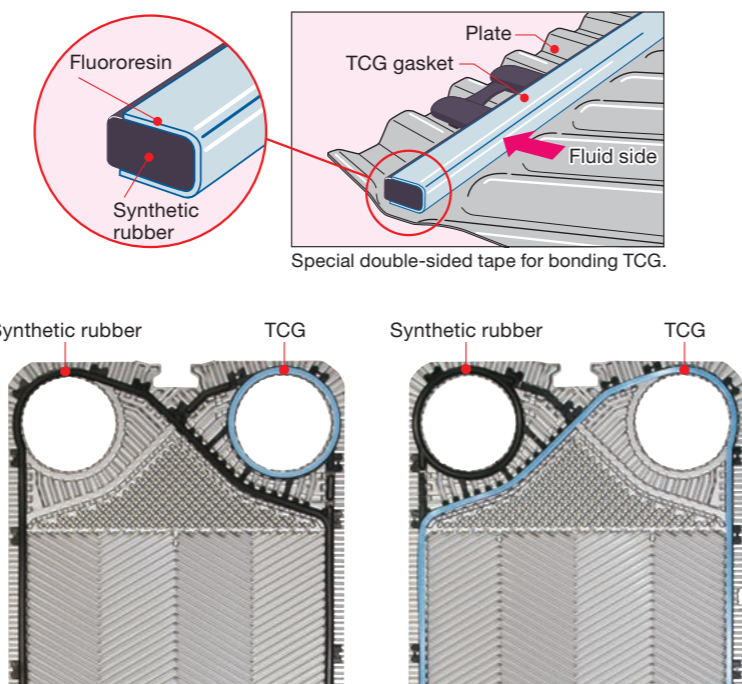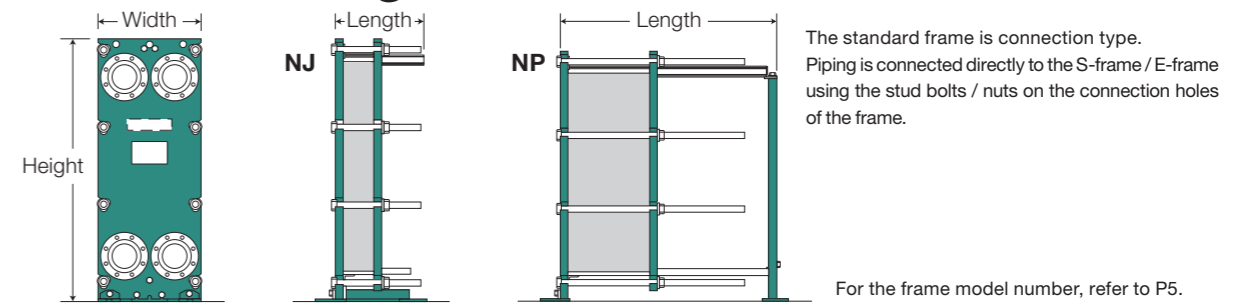Structure of Fluororesin Cushion Gaskets
















Dimensions and Weight



Model	Installation height (mm)	Installation width (mm)	Heat transfer area and installation length / weight (Top: Installation length (mm) / Bottom: Weight (kg))																
			1m ²	5m ²	10m ²	15m ²	30m ²	60m ²	100m ²	200m ²	500m ²	800m ²	1,200m ²	1,600m ²					
RX-00	488	242	400																
RX-10	1,177	460	396	396	396	836	1,036												
RX-30	1,850	650				816	816	1,216	1,416	1,616									
RX-50	2,231	820				1,086	1,222	1,530	1,924	2,932									
RX-70	2,584	900					913	1,113	1,513	2,113	3,513								
RX-90	3,140	1,370					1,983	2,289	2,708	3,730	6,169								
LX-00	857	350	418	518															
LX-10	1,066	460	170	210															
LX-30	1,675	650	396	396	836	1,336													
LX-50	2,045	810	310	364	433	508													
LX-90	2,418	1,480			816	816	1,016	1,616	2,216										
SX-10	1,590	360			1,000	1,050	1,240	1,630	2,160										
SX-20	1,870	540					913	1,113	1,513	2,313									
SX-30	2,683	684					1,920	2,350	2,900	4,310									
SX-40	2,166	805						1,007	1,257	2,007	4,010	5,510							
SX-70	2,692	1,070	426	426	426	426	726	926	1,526										
SX-80	2,929	1,220	280	310	340	390	500	730	1,030										
SX-90	3,410	1,290				620	820	1,020	1,220	2,020									
UX-10	1,115	408				950	1,050	1,250	1,520	2,220									
UX-20	1,540	550					713	913	1,113	1,713	2,913	3,713							
UX-30	1,891	610					1,670	1,860	2,120	2,800	4,970	6,170							
UX-90	2,929	1,300						913	1,113	1,513	3,113								
UX-100	3,780	1,570						2,040	2,400	3,290	6,210								
UX-130	4,215	1,570								1,510	2,510	3,510							
UX-160	4,246	1,900								4,220	6,270	8,750							
WX-10	3,140	1,370								1,757	1,757	2,507	3,757	4,507					
WX-50	2,233	820								4,180	5,130	8,160	11,270	14,820					
WX-90	2,829	1,450										3,000	4,000	5,300	6,300				
CX-10	895	346	328	328	638	838													
GX-20	1,593	580	170	209	267	325													
EX-15	1,445	550	933	933	933	1,133	1,933												
EX-11	2,100	760	520	640	830	1,000	1,460												
			366	366	792	992	1,192	1,992											
			477	551	697	788	1,063	1,618											
								1,207	1,407	1,807									
								1,915	2,418	3,088									

















Note: The dimensions and weight are subject to change without notice.

Plate Types and Dimensions

Type	Main specifications		Frame standard type		
			Width and Height	NJ type	NP type
RX-00	Max. flow rate / unit	~20m³/h			
	Max. working pressure	2.0MPaG			
	Max. working temperature	180°C			
	Max. heat transfer area / unit	1m²			
	Porthole Dia.	35mm			
	Connection Dia.	20A			
RX-10	Max. flow rate / unit	197m³/h			
	Max. working pressure	2.7MPaG			
	Max. working temperature	180°C			
	Max. heat transfer area / unit	30m²			
	Porthole Dia.	100mm			
	Connection Dia.	100A			
RX-30	Max. flow rate / unit	445m³/h			
	Max. working pressure	1.8MPaG			
	Max. working temperature	180°C			
	Max. heat transfer area / unit	200m²			
	Porthole Dia.	150mm			
	Connection Dia.	150A			
RX-50	Max. flow rate / unit	923m³/h			
	Max. working pressure	2.1MPaG			
	Max. working temperature	180°C			
	Max. heat transfer area / unit	500m²			
	Porthole Dia.	216mm			
	Connection Dia.	200A			
RX-70	Max. flow rate / unit	1,286m³/h			
	Max. working pressure	1.3MPaG			
	Max. working temperature	150°C			
	Max. heat transfer area / unit	500m²			
	Porthole Dia.	255mm			
	Connection Dia.	250A			
RX-90	Max. flow rate / unit	3,167m³/h			
	Max. working pressure	1.6MPaG			
	Max. working temperature	130°C			
	Max. heat transfer area / unit	1,600m²			
	Porthole Dia.	400mm			
	Connection Dia.	400A			















Note : The above data are subject to change without notice.

Plate Types and Dimensions

Type	Main specifications		Frame standard type		
			Width and Height	NJ type	NP type
LX-00	Max. flow rate / unit	69m³/h			
	Max. working pressure	1.8MPaG			
	Max. working temperature	180°C			
	Max. heat transfer area / unit	5m²			
	Porthole Dia.	59mm			
	Connection Dia.	50A			
LX-10	Max. flow rate / unit	197m³/h			
	Max. working pressure	1.6MPaG			
	Max. working temperature	180°C			
	Max. heat transfer area / unit	15m²			
	Porthole Dia.	100mm			
	Connection Dia.	100A			
LX-30	Max. flow rate / unit	481m³/h			
	Max. working pressure	1.25MPaG			
	Max. working temperature	180°C			
	Max. heat transfer area / unit	100m²			
	Porthole Dia.	156mm			
	Connection Dia.	150A			
LX-50	Max. flow rate / unit	791m³/h			
	Max. working pressure	1.25MPaG			
	Max. working temperature	180°C			
	Max. heat transfer area / unit	200m²			
	Porthole Dia.	200mm			
	Connection Dia.	200A			
LX-90	Max. flow rate / unit	3,230m³/h			
	Max. working pressure	1.6MPaG			
	Max. working temperature	130°C			
	Max. heat transfer area / unit	800m²			
	Porthole Dia.	404mm			
	Connection Dia.	400A			
CX-10 Vertical	Max. flow rate / unit	108m³/h			
	Max. working pressure	1.9MPaG			
	Max. working temperature	150°C			
	Max. heat transfer area / unit	15m²			
	Porthole Dia.	74mm			
	Connection Dia.	50A			
CX-10 Horizontal	Max. flow rate / unit	108m³/h			
	Max. working pressure	1.9MPaG			
	Max. working temperature	150°C			
	Max. heat transfer area / unit	15m²			
	Porthole Dia.	74mm			
	Connection Dia.	50A			
















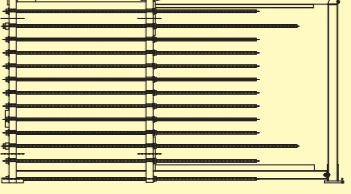
Note : The above data are subject to change without notice.

Plate Types and Dimensions

Type	Main specifications		Frame standard type		
			Width and Height	NJ type	NP type
SX-10	Max. flow rate / unit	80m³/h			426 to 1,526 
	Max. working pressure	2.0MPaG			
	Max. working temperature	100°C			
	Max. heat transfer area / unit	100m²			
	Porthole Dia.	65mm			
	Connection Dia.	50A			
SX-20	Max. flow rate / unit	220m³/h			620~2,020 
	Max. working pressure	3.0MPaG			
	Max. working temperature	100°C			
	Max. heat transfer area / unit	200m²			
	Porthole Dia.	105mm			
	Connection Dia.	100A			
SX-30	Max. flow rate / unit	445m³/h			713 to 3,713 
	Max. working pressure	3.0MPaG			
	Max. working temperature	100°C			
	Max. heat transfer area / unit	600m²			
	Porthole Dia.	150mm			
	Connection Dia.	150A			
SX-40	Max. flow rate / unit	940m³/h			758~3,757 
	Max. working pressure	2.4MPaG			
	Max. working temperature	110°C (100°C for some cases)			
	Max. heat transfer area / unit	500m²			
	Porthole Dia.	218mm			
	Connection Dia.	200A			
SX-70	Max. flow rate / unit	1,337m³/h			1,510~4,510 
	Max. working pressure	3.0MPaG			
	Max. working temperature	100°C			
	Max. heat transfer area / unit	800m²			
	Porthole Dia.	260mm			
	Connection Dia.	250A			
SX-80	Max. flow rate / unit	2,424m³/h			1,510~4,510 
	Max. working pressure	2.0MPaG			
	Max. working temperature	180°C			
	Max. heat transfer area / unit	1,600m²			
	Porthole Dia.	350mm			
	Connection Dia.	350A			
SX-90	Max. flow rate / unit	2,565m³/h			1,762~6,262 
	Max. working pressure	2.0MPaG			
	Max. working temperature	130°C			
	Max. heat transfer area / unit	1,600m²			
	Porthole Dia.	360mm			
	Connection Dia.	350A			
















Note : The above data are subject to change without notice.

Plate Types and Dimensions

Type	Main specifications		Frame standard type		
			Width and Height	NJ type	NP type
UX-10	Max. flow rate / unit	97m³/h		385~400 	825~1,440 
	Max. working pressure	2.5MPaG			
	Max. working temperature	150°C			
	Max. heat transfer area / unit	30m²			
	Porthole Dia.	70mm			
	Connection Dia.	50A			
UX-20	Max. flow rate / unit	197m³/h		362~385 	788~2,011 
	Max. working pressure	2.0MPaG			
	Max. working temperature	180°C			
	Max. heat transfer area / unit	60m²			
	Porthole Dia.	100mm			
	Connection Dia.	100A			
UX-30	Max. flow rate / unit	285m³/h			598~2,821 
	Max. working pressure	2.2MPaG			
	Max. working temperature	180°C			
	Max. heat transfer area / unit	200m²			
	Porthole Dia.	120mm			
	Connection Dia.	100A			
UX-90	Max. flow rate / unit	2,314m³/h			1,760~5,760 
	Max. working pressure	1.7MPaG			
	Max. working temperature	150°C			
	Max. heat transfer area / unit	800m²			
	Porthole Dia.	342mm			
	Connection Dia.	350A			
UX-100	Max. flow rate / unit	4,948m³/h			2,262~8,262 
	Max. working pressure	1.3MPaG			
	Max. working temperature	100°C			
	Max. heat transfer area / unit	1,600m²			
	Porthole Dia.	500mm			
	Connection Dia.	500A			
UX-130	Max. flow rate / unit	4,948m³/h			2,262~8,262 
	Max. working pressure	1.3MPaG			
	Max. working temperature	100°C			
	Max. heat transfer area / unit	1,600m²			
	Porthole Dia.	500mm			
	Connection Dia.	500A			
UX-160	Max. flow rate / unit	7,300m³/h			Up to 8,906 
	Max. working pressure	2.3MPaG			
	Max. working temperature	100°C			
	Max. heat transfer area / unit	4,300m²			
	Porthole Dia.	600mm			
	Connection Dia.	600A			

Note : The above data are subject to change without notice.


Plate Types and Dimensions

Type	Main specifications		Frame standard type		
			Width and Height	NJ type	NP type
WX-10	Max. flow rate / unit	209m³/h			
	Max. working pressure	4.8MPaG			
	Max. working temperature	180°C			
	Max. heat transfer area / unit	30m²			
	Porthole Dia.	103mm			
	Connection Dia.	100A			
WX-50	Max. flow rate / unit	791m³/h			
	Max. working pressure	4.1MPaG			
	Max. working temperature	180°C			
	Max. heat transfer area / unit	200m²			
	Porthole Dia.	200mm			
	Connection Dia.	200A			
WX-90	Max. flow rate / unit	2,208m³/h			
	Max. working pressure	2.3MPaG			
	Max. working temperature	150°C			
	Max. heat transfer area / unit	800m²			
	Porthole Dia.	334mm			
	Connection Dia.	350A			
GX-20	Max. flow rate / unit	314m³/h			
	Max. working pressure	0.65MPaG			
	Max. working temperature	130°C			
	Max. heat transfer area / unit	30m²			
	Porthole Dia.	126mm			
	Connection Dia.	100A			
EX-15	Max. flow rate / unit	197m³/h			
	Max. working pressure	1.3MPaG			
	Max. working temperature	180°C			
	Max. heat transfer area / unit	60m²			
	Porthole Dia.	100mm			
	Connection Dia.	100A			
EX-11	Max. flow rate / unit	641m³/h			
	Max. working pressure	1.2MPaG			
	Max. working temperature	180°C			
	Max. heat transfer area / unit	100m²			
	Porthole Dia.	180mm			
	Connection Dia.	200A			

Note : The above data are subject to change without notice.

Plate Heat Exchanger Lineup

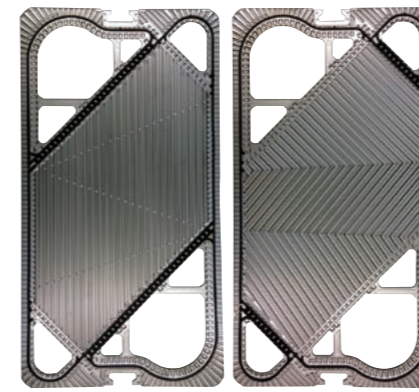Condenser / Gas Cooler (YX)




YX-83 plate

Characteristics

- The heat transfer coefficient is about 2 times higher than that of shell & tube heat exchangers. The condensing surface is always secured and the heat transfer coefficient is improved because condensate is immediately drained out.
- Special considerations are taken for the plate characteristics in order to achieve a much lower vapor pressure drop than conventional Plate Heat Exchangers.
- The cooling water consumption is about half that of S&T heat exchangers.
- TCG gaskets are selectively used to permit a wide range of applications.
- Less maintenance work, as the plates can be easily cleaned and inspected.
- The vapor connection sizes holes are the same for the inlets and outlets, allowing for use as a cooling condenser for vapor with inert gas.
- Various international Pressure Vessel Code and Standard such as ASME, JIS, CE available.


Applications

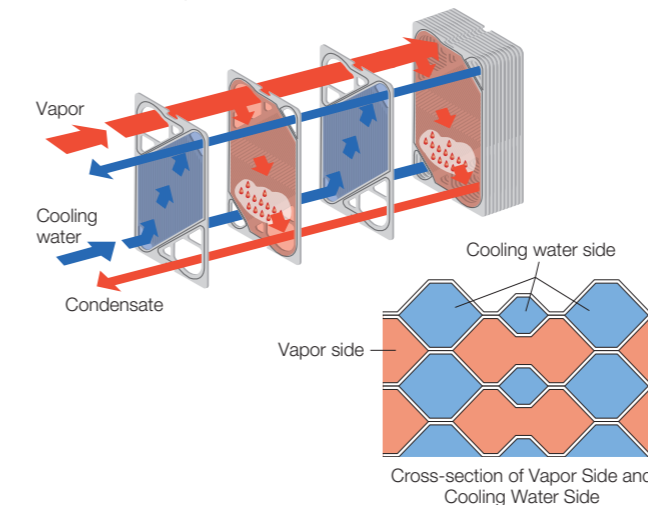- Overhead condensers for various distillation columns
- Condensers / preheaters for evaporators
- Condensers for gas drying / air conditioning
- Heat recovery exchangers from exhaust steam
- Gas coolers, etc.



Multi Gap Plate (GX)

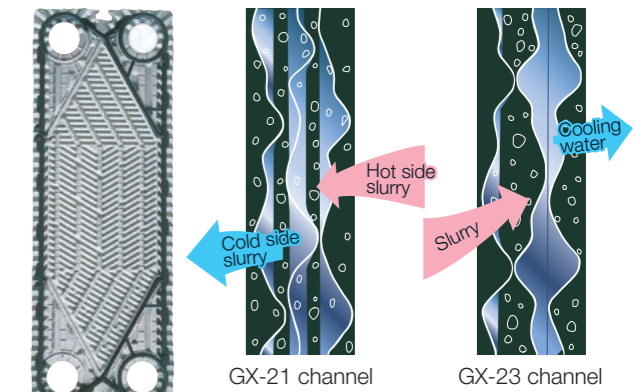By combination of one plate arrangement gives 3 multiple-channel configuration.



GX-20
(By reversing and upside-down GX-21 to GX-22.)

Characteristics


- Easy for fluids containing solids to flow between wide gap channels (10 mm).
- A combination of plates provides the widest channel spacing (20 mm).
- It provides better performance for slurry, sludge and liquid containing crystals.
- Electrolytic polishing selectively used for food applications.
- Shorter maintenance time due to the slit-in gasket.

Applications

- Chemicals**
 - Fluids containing solids: Polyvinyl chloride (polymer), various slurry fluids
 - High viscosity fluids: Rubber latexes, resin latexes
- Dyeing**
 - Fluids containing fibers: Waste fluid from Dyeing machine
 - High viscosity fluids: Viscose
- Food**
 - Fluids containing solids: Sauce for grilled meat, juice with fiber, factory waste water
 - Fluids containing fibers: Amazake
 - High viscosity fluids: Mayonnaise, various sauces, starch saccharification liquid, syrup
- Sugar**
 - Fluids containing solids: Raw juice, sugar making process such as the Steffen process, processed fluids, factory waste water
- Pulp and paper**
 - Fluids containing fibers: Diluted black liquor, white liquor
- Other**
 - Plating fluid containing sludge, quenching oil
 - High concentration sodium hypochlorite, sodium aluminate
 - Heat transfer for significantly different flow rates on the hot / cold sides plant
 - Snow melting plant

Plate Heat Exchanger Lineup

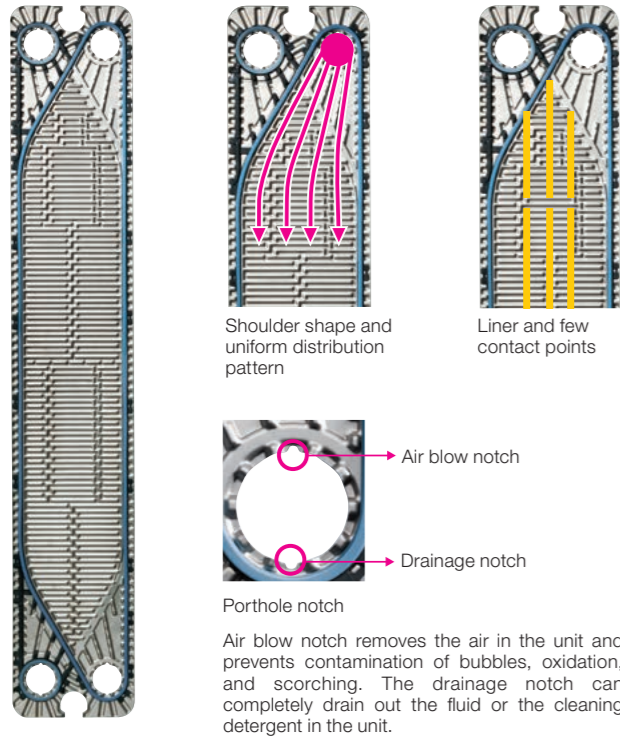
Exclusive Food Application Plate (FX)




Characteristics

- The uniform distribution pattern and the shape of the shoulder section are smoothed to create a uniformly smooth flow through the plate channels, enabling product-gently heat transfer with a uniform, and even temperature in the unit.
- The plate contact points have been significantly reduced to 1/4th of the conventional pattern, and the liner and few contact points arrangement has a self-cleaning effect. For that reason, long-term operation is possible, as it is less to clogs, scales and partial scorching than conventional type.
- The piston flow in the plate channels reduce the fluid replacement time to 1/4th of the conventional type, significantly reducing the product loss by 75%.
- There is also little dead space within the channels and holding volume is small, achieving a high CIP effect.
- The slit-in type TCG gasket also prevents rubber smells / glue smells in the product and remain scents when switching products to be produced.

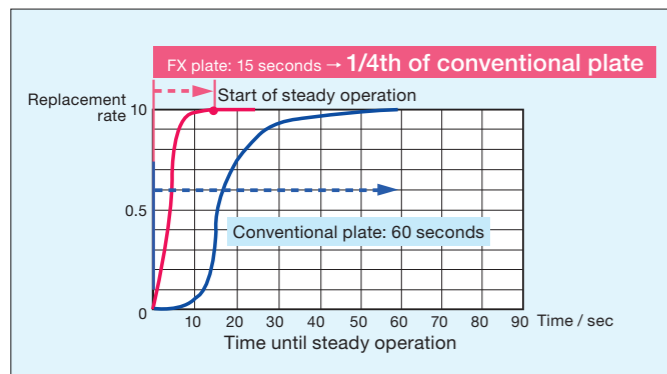Less Product Loss



Dual Wall Plate

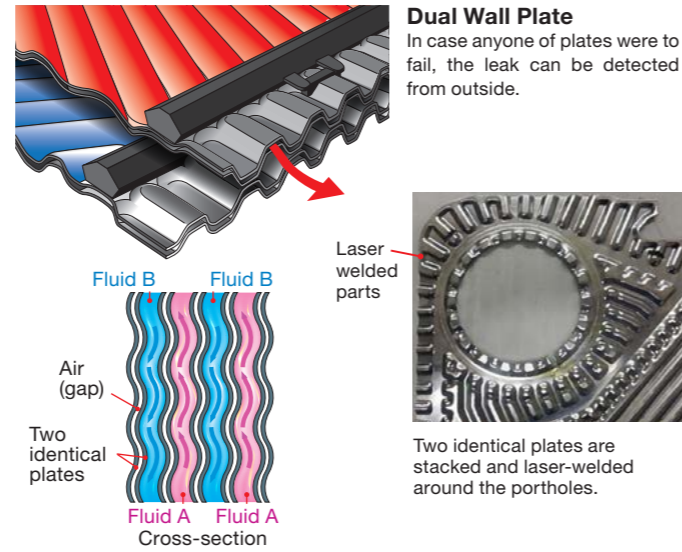

The dual wall plate heat exchangers use to achieve "relief and reliance" for preventing contamination of the two fluids.

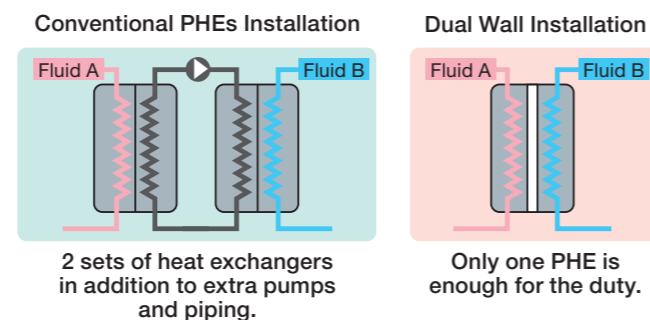
Characteristics

- The dual wall design prevents any leaks from going farther due to the air gap and the second plate. In case any one of plates were to fail, the leak can be detected from outside because of leaking through the gap of the plates.
- To prevent intermixing of the fluids, "Double seal gasket" (refer to P6) system is used. Any leakage of fluids across the gasket can be detected from the outside because the liquid escapes from the units.


Applications

- Cooling of transformer oil, which might explode if mixed with the cooling water
- Cooling of lubrication or hydraulic oil, which can damage the rotor or hydraulic equipment if mixed with the cooling water
- Heating / cooling of food processing, where there must be no mixing of foreign materials in the product
- Heating / cooling of fuel oil (marine gas oil: MGO) where fatigue breakdown due to highly frequent pulsation
- Heating / cooling in bio-process where the process fluid may cause environmental pollution
- Heating / cooling between fluids where mixing can cause a sudden chemical reaction or generate environmental pollutants

It is normally necessary to install two heat exchangers where it is dangerous if fluid A and fluid B are mixed. However, with the dual wall plate, this is possible with just one unit.



Double-lined Gasket Plate Hestia NX-50

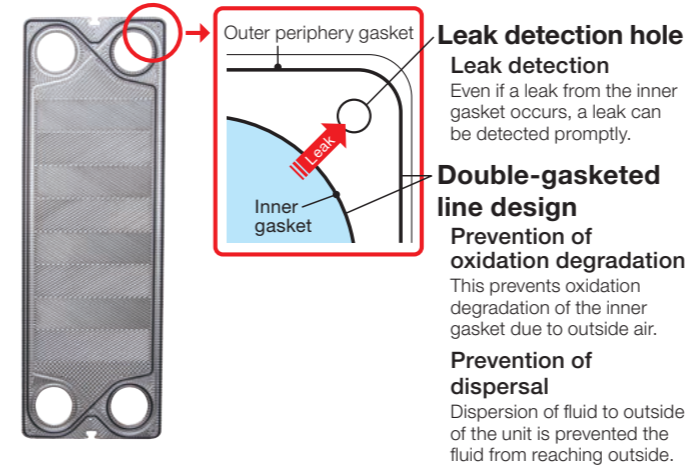


Characteristics

- The double-gasketed line design provides a gasket line to the outermost periphery to inhibit oxidation degradation in the inner gasket (which serves as a seal) from outside air.
- It prevents leakage dispersal. Should a leak occur in the inner gasket, this prevents the fluid from reaching outside.
- To achieve high heat-resistance, the compounding ratio of the gasket has been improved.
- The improved gasket groove and plate pattern increase seal pressure and ensure high pressure-resistance.
- It achieves a life time 5 times longer than Hisaka's conventional Plate Heat Exchangers.
- High heat-resistance and pressure-resistance allow for environments with high temperature of 250°C and seal pressure of 9.5Mpa or higher, which conventional PHE couldn't use.

Applications


- High temperature / High pressure fluids
High temperature, high pressure heat exchangers around boilers or the like
Heat exchangers in conventional / nuclear power applications
- Dangerous fluids
Heat exchangers for flammable and dangerous fluids in locations such as chemical plants

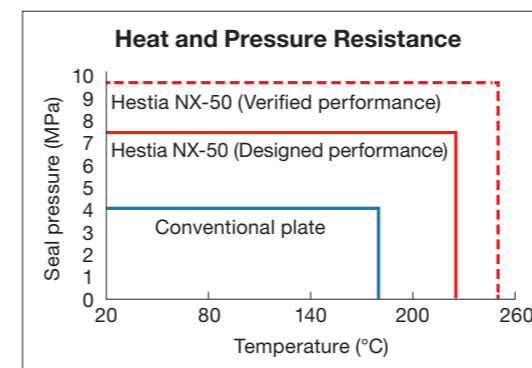High-Heat / High-Pressure Resistance



* The Hestia NX-50 was developed jointly with Hitachi-GE Nuclear Energy, Ltd.
* Patent pending

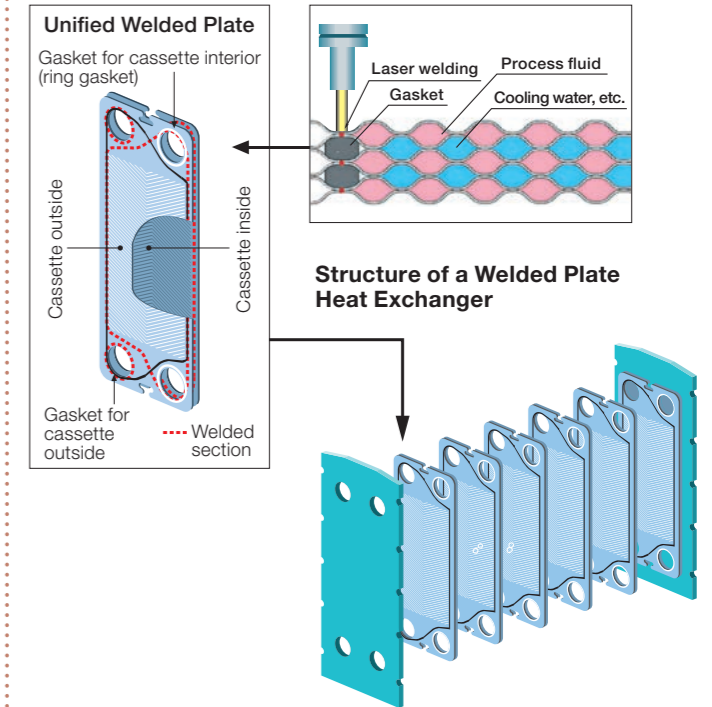Semi-welded Plate (WX)



Characteristics

- A couple of plates are laser welded with o-ring at portholes between the plates. One fluid flowing through the inside of the cassettes and the other fluid flowing on the outside of the cassettes.
- As disassembly is possible for each plate cassette, both sides of the plate cassette can be cleaned.
- As plate cassettes is sealed by laser welding except the portholes, this product is fit for high pressure duty, Freon refrigerants or fluids that corrode synthetic rubber.
- There are two types of ring gaskets; a synthetic rubber, and PTFE gasket (TCG) with outstanding chemical resistance.

Applications


- Heating / cooling of fluids that corrode synthetic rubber
- Heating / cooling of dangerous fluids such as sulfuric acid
- Heating / cooling for the duty exceeding the heat or pressure resistance of gasket-type plate heat exchangers
- Heating / cooling in refrigeration cycles using refrigerant

Specification

	Conventional model	Welded model
Pressure resistance	Up to 3.0 MPaG	Up to 4.0 MPaG
Heat resistance	150°C	180°C

Plate Heat Exchanger Lineup

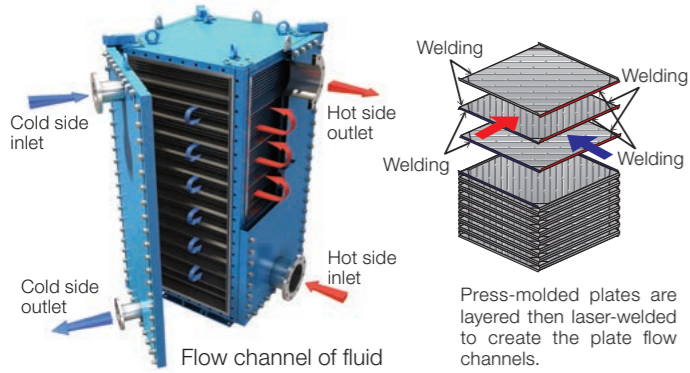Welded Plate Heat Exchangers



Variety of plate gap

- HXS (1) Both sides dirty fluids
HXS: Both side rectangular free gap circuits equipped with studs.
- HXE (2) One side highly charged fluid
HXE: One side free gap circuit and the other side dimpled circuit.
- HXC Free flow (3) One charged fluid
HXC Freeflow: One side free gap corrugated circuit and the other side corrugated circuit.
- HXC (4) Both sides lightly charged fluid
HXC: Both sides corrugated circuits

*Free gap: Plate gap with no contact between the heat transfer plates

Characteristics

- The press-molded plate is molded with a special corrugation pattern to ensure a high transfer coefficient.
- It supports high temperatures and high pressures, showing its performance in a wide range of fields.
- The seal gasket consists only of the side cover, so there are virtually no restrictions due to gasket materials.
- As baffles can be installed to enable a multi-pass design, heat transfer performance is close to a counter-current flow, and has a flexible flow rate.
- As the holding volume is small, the amount of fluid remaining in the unit is also small and only a small amount of CIP detergent can be used.
- Easy mechanical cleaning by the cross flow channel structure.

Applications


- Heat transfer process for higher efficiency than Shell & Tube heat exchangers
 - Heat recovery in high temperature / high pressure applications
 - Condensers
 - Vaporizers
 - Heat transfer process where a Gasketed PHE cannot be used
- They are also able to replace Shell & Tube heat exchangers in other cases as well.

Specification

Max. working pressure	3.5 [MPaG]
Max. working temperature	Up to 350 [°C]
Connection size	50A to 600A
Max. heat transfer area	Up to 700 m ² /unit
Plate material	Stainless steel, titanium, high nickel alloy

* The above mentioned varies depending on the operating conditions. Please inquire with our company when planning.

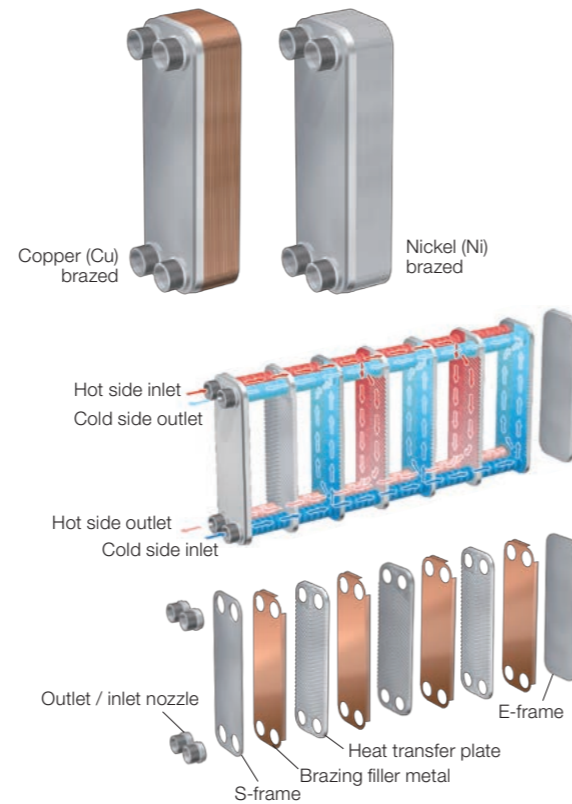Brazed Plate Heat Exchangers



Characteristics

- Brazed plate heat exchangers are brazed stainless steel plates by brazing filler metal such as copper or nickel.
- It is high performance and allows for a small heat transfer area.
- Due to the small heat transfer area and the thin material by sturdy brazed structure, light weight, and compact design are achieved.
- With brazed structure, it provides a high level of sealing and outstanding heat and pressure resistance.
- The brazed structure reduced material to minimum is fit for mass production and is economically outstanding.

Applications

- Vaporizers / condensers of refrigerant in compression refrigeration cycles (refrigerators / heat pumps)
- Solution heat exchangers for absorption refrigerators
- Industrial and home water heaters
- Heat recovery heat exchangers for cogeneration systems or gas heat pumps
- Oil coolers for hydraulic equipment
- Heat exchangers for temperature control of various industrial equipment and medical examinations

Specification

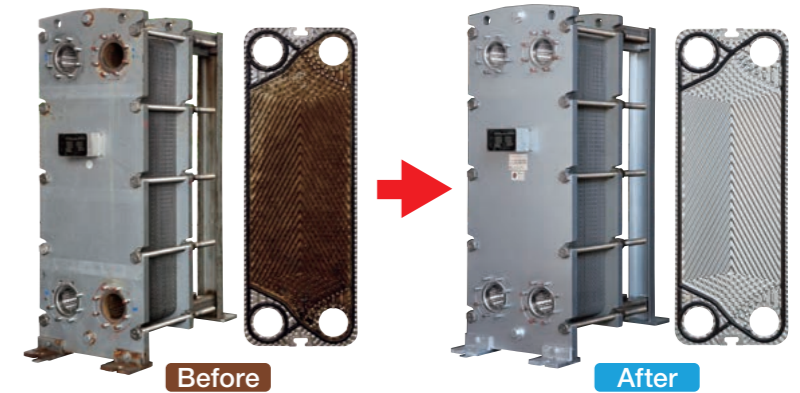
Design pressure: F.V. to 4.5 MPa
Design temperature: -100°C to 200°C

* The above mentioned varies by model. Please inquire with our company when planning.

Maintenance Menu

PHE Total Maintenance [Full Service Package] from pickup to assembly

The Full Service Package is a total maintenance service in HISAKA. PHE disassembly, visual checks of plates, cleaning, regasketing, frame repairs, assembly, and final inspection are all performed by service centers, for the best possible performance and a long operating life time for PHEs. We also offer the "Full Service Package" for plates only.



Return Containers for "Full Service Package" for plate only (Optional)



Return containers that precisely fit the plates that are currently in use are provided upon customers' request.

On-site Maintenance

HISAKA can send skilled service engineers to perform maintenance work at the customer's site. We use specialized tools, such as automatic tightening devices, to efficiently disassemble and assemble the PHE and high temperature hot water jet cleaning to remove sticky oil residues, providing high quality maintenance service at the customer's site.



Cleaning In Place (CIP)

Disassembly and cleaning a PHE makes it possible to remove hard scale and clogging matters and to recover performance to nearly the same level as new. However, if disassembly and cleaning are not possible, HISAKA offers CIP using "Plate-Clean" at customers' site. Before scaling, CIP with Plate-Clean can restore performance by removing scale through washing and dissolving. This is effective in prolonging the disassembly cleaning cycle of the PHE. This is effective for extending the disassembly cleaning cycle of plate heat exchangers.

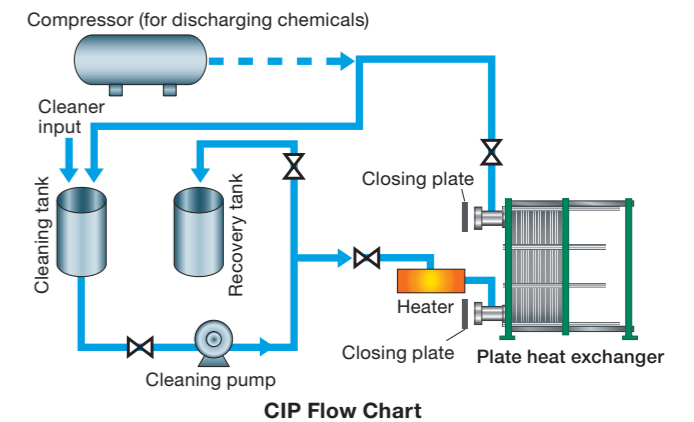


Plate-Clean

Plate-Clean is a dedicated cleaner for PHEs. By circulating the cleaner inside the PHE, hard scale that forms on the cooling water, warm water, and steam sides can be easily removed by CIP without disassembling the unit.

*Each cleaner can be purchased.



Plate Heat Exchangers Used in Various Applications

Chemicals



Soda, fertilizer, petrochemistry, petroleum refining, oil and fat, chemicals, general inorganic / organic chemical industry, etc.

HVAC



Heating / cooling system, water heating, district heating / cooling, building heat storage tank systems, unused energy

Marine



Cooling of engine jacket water and lubricant oil

Electric Power



Generators, cogeneration

Gas Treatment



CO₂ recovery, desulfurization plant solution heat exchange

Metal



Sulfuric acid, electrolytic plating cooling

Environment



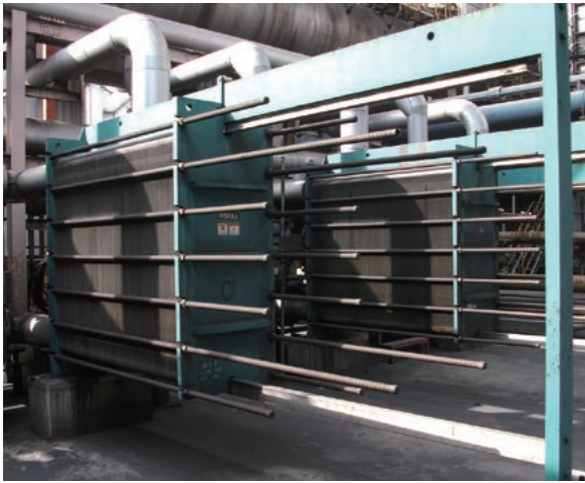
Solvent recovery, exhaust gas cooling

Central Cooling



Central cooling system

Iron and Steel



Blast furnace cooling, continuous casting equipment cooling, COG, various plating fluid cooling

Pulp & Paper



Heat exchange of black liquor / white water, oven blow gas condensation, waste heat recovery

Food



Beer, edible oil, sodium glutamate

Fermentation / Distillation



Brewing, alcohol fermentation process such as for bioethanol

HISAKA Global Network

HISAKA Group

■ **Malaysia**
HISAKAWORKS S.E.A. SDN. BHD.
KUALA LUMPUR
 TEL: +60-3-8081-4185 FAX: +60-3-8081-7185
 E-mail : heatexc@hisaka-asia.com

■ **PENANG BRANCH**
 TEL : +60-16-203-2527
 E-mail : cyyp@hisaka-asia.com

■ **JOHOR BRANCH**
 TEL : +60-12-227-4882
 E-mail : cswong@hisaka-asia.com

■ **Thailand**
HISAKA WORKS (THAILAND) CO., LTD.
BANGKOK
 TEL: +66-2-744-3287 FAX: +66-2-744-3286
 E-mail : heatexc@hisaka-thai.com

■ **SATTAHIP SALES OFFICE**
 TEL: +66-3-819-9819 FAX: +66-3-818-9820
 E-mail : heatexc@hisaka-thai.com

■ **Singapore**
HISAKAWORKS SINGAPORE PTE. LTD.
 TEL: +65-6-897-8489 FAX: +65-6-686-4579
 E-mail : heatexc@hisaka-sing.com

■ **Indonesia**
PT. HISAKA WORKS INDONESIA
 TEL: +62-51-2931-9235

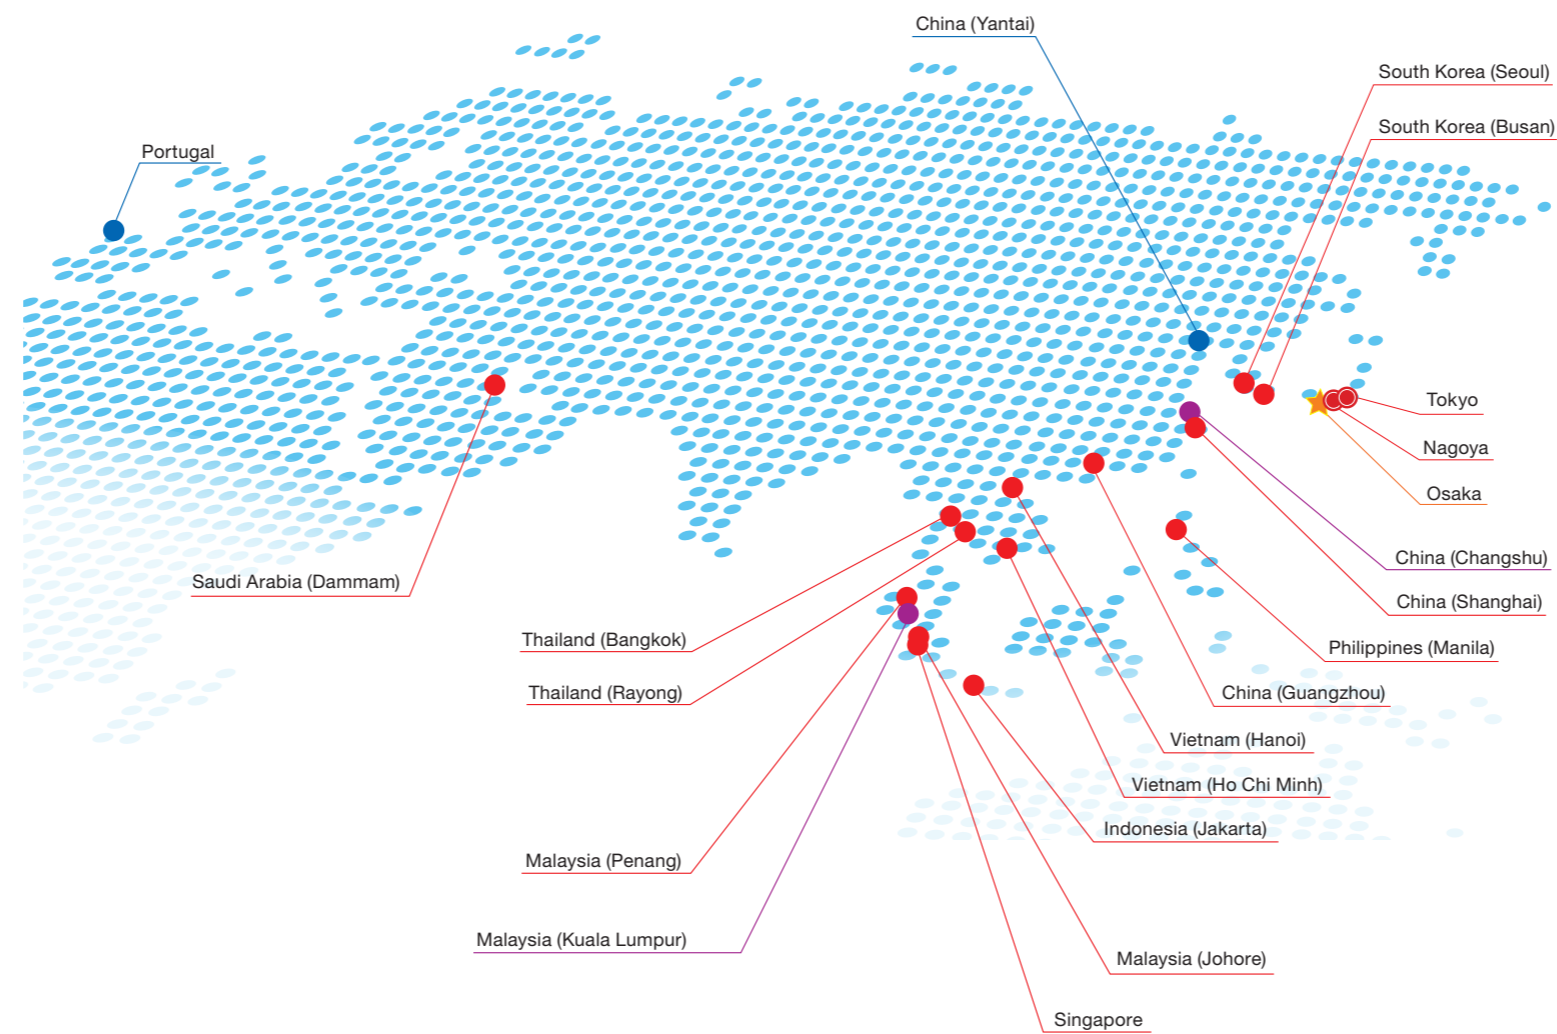
■ **Vietnam**
HISAVINA Ho Chi Minh (Representative Office of HISAKAWORKS S.E.A. SDN. BHD.)
 TEL: +84-8-3910-7355 FAX: +84-8-3910-7356
 E-mail : hisavina@hisaka-asia.com

■ **HISAVINA Hanoi (Representative Office of HISAKAWORKS S.E.A. SDN. BHD.)**
 TEL: +84-4-3795-9900 FAX: +84-4-3795-9911

■ **Philippines**
HISAPINO Manila (Representative Office of HISAKAWORKS S.E.A. SDN. BHD.)
 TEL: +63-2-224-4129 FAX: +63-2-224-4130
 E-mail : hisapino@hisaka-asia.com

■ **South Korea**
HISAKA KOREA CO., LTD.
SEOUL
 TEL: +82-2-739-8861 FAX: +82-2-739-8864
 E-mail : heatexc@hisakakorea.com

■ **BUSAN BRANCH**
 TEL: +82-51-747-0265 FAX: +82-51-747-0266



★ Headquarters / Production Base
 ● Branch Office

● Group Company / Production Base
 ● Group Company and Local Sales Office
 ● Technology Transferee

● **Technology Transferee**
ARSOPI THERMAL S.A. (Portugal)
 TEL: +351-256-410-410 FAX: +351-256-410-411

● **YANTAI SHINWA JOINT TECHNOLOGY CO., LTD. (China)**
 TEL: +86-535-643-3939 FAX: +86-535-643-3926

■ **China**
HISAKA WORKS (CHINA) CO., LTD.
Changshu
 TEL: +86-512-5213-3000 FAX: +86-512-5213-3008

■ **SHANGHAI BRANCH**
 TEL: +86-21-5211-0701 FAX: +86-21-5211-0720
 E-mail : hisaka-sha@hisaka.co.jp

■ **GUANGZHOU BRANCH**
 TEL: +86-20-3810-5515 FAX: +86-20-3847-7539

■ **Saudi Arabia**
HISAKA MIDDLE EAST CO., LTD.
DAMMAM
 TEL: +966-13-838-4700 FAX: +966-13-838-5800
 E-mail : info@hisaka-me.com

HISAKA Maintenance Network

■ **Malaysia**
HISAKAWORKS S.E.A. SDN. BHD.
 No2, Jalan TP2, Taman Perindustrian SIME UEP, 47600 Subang Jaya, Selangor Darul Ehsan, Malaysia
 TEL: +60-3-8081-4185 FAX: +60-3-8081-7185

■ **XONG LIN INDUSTRIAL TRADING SDN BHD**
 506, Jalan Perusahaan, Taman Industri Waja, 09000 Kulim, Kedah Darul Aman, Malaysia
 TEL : +60-3-8081-4185

■ **Thailand**
HISAKA WORKS (THAILAND) CO., LTD.
RAYONG SALES OFFICE
 300/118, Moo1, Tambol Tasit, Amphoe Pluakdaeng, Rayong 21140, Thailand
 TEL: +66-3-802-9532 FAX: +66-3-802-9530

■ **Singapore**
JECS SINGAPORE (PTE) LTD.
 26, Gul Drive, Jurong Town, Singapore 629474
 TEL: +65-6-861-5577 FAX: +65-6-861-4253

■ **Indonesia**
PT UNGGUL PRAKARSA PRISMA
 Jl. Industri Selatan 8, Blok EE-8E, Kawasan Industri Jababeka 2, Cikarang Bekasi 17550, West Java
 TEL : +62-21-8984-1348

■ **Vietnam**
HESCO TECHNOLOGY COMPANY LIMITED
 1391 Phan Văn Trị, Phường 10, Quận Gò Vấp, Tp.HCM
 TEL : +84-8-2253-0506

■ **Philippines**
JACHIN-BOAS SALES AND SERVICES CO.
 Laguna Belair 1, Brgy. Don Jose, Sta. Rosa, Laguna
 TEL : +63-4-9559-4345

■ **South Korea**
CLEANPIA.s
 187, Sunhwan-ro, Jungwon-gu, Seongnam-si, Gyeonggi-do, 13207, Republic of Korea
 TEL : +82-1877-5335

■ **China**
HISAKA WORKS (CHINA) CO., LTD., Changshu Plant
 No. 1 Xiangyuan Road, Changshu Southeast Economic Development Zone, Changshu City, Jiangsu Province 215542, P.R. China
 TEL : +86-512-5213-3000

■ **Saudi Arabia**
HISAKA MIDDLE EAST CO., LTD.(Saudi Arabia)
 P.O Box: 7102, Dammam 32435, Building No. 3861, Al Khudhariya Industrial Area, Dammam Saudi Arabia
 TEL : +966-13-838-4700

■ **Portugal**
ARSOPI THERMAL S.A.(Portugal)
 P.O. Box 103, Codal 3730-901, Vale de Cambra, Portugal
 TEL : +351-256-410-410