


HISAKA PLATE HEAT EXCHANGER

1. Plate Heat Exchanger (PHE) / Arrangement of heat transfer plate

PHE's plate pack consists of Heat transfer plate and Plate gasket.

The first heat transfer plate between S-Frame, L-Frame, C-Frame and E-Frame is called "D-Plate". The end plate is called "E-Plate". Plates between D-Plate and E-Plate are called "Channel Plate". Plate arrangement shall follow the below illustration.

First and end plate in the table below shows the case of A-Plate.

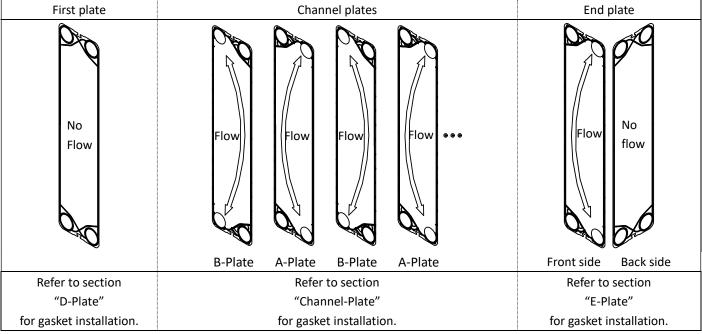


- Gasket has each type, style, size and setting position depend on PHE models.
- For gasket installation, refer to the manual "12-3-2 Replacement of Plate Gasket".
- Refer to Mixed Gasket Materials Manual for Several Composition Materials.
- For checking the model of the device you are using, refer to the manual "7 Model Description".


Note1) When purchase gaskets from our company, make sure the latest information because shape of gasket may change without prior notice.


2. Type and name of heat transfer plate and gasket.


Channel-Plate

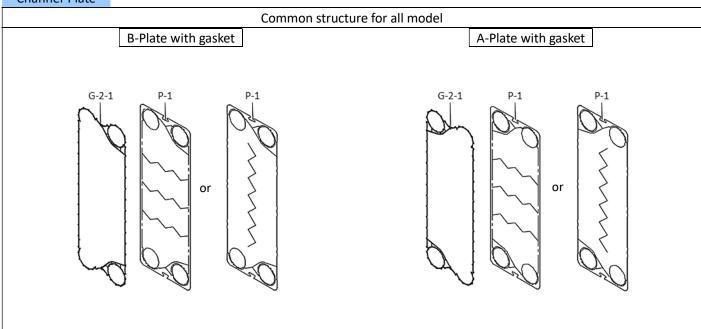

P-1	PLATE (4-HOLES)
G-2-1	PLATE GASKET

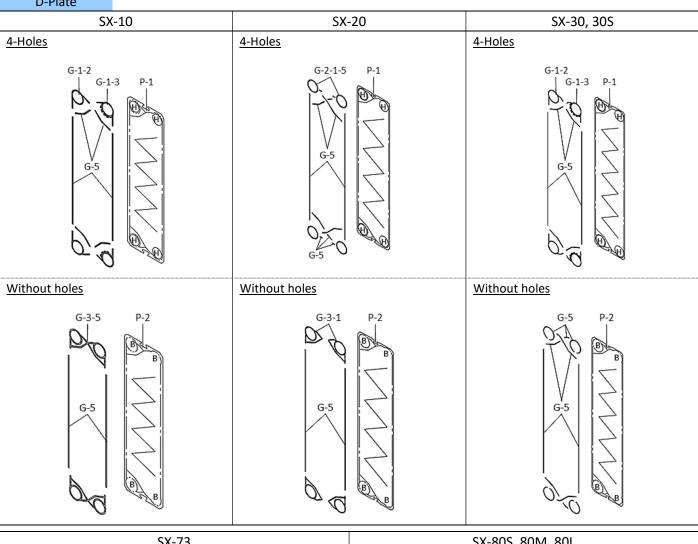

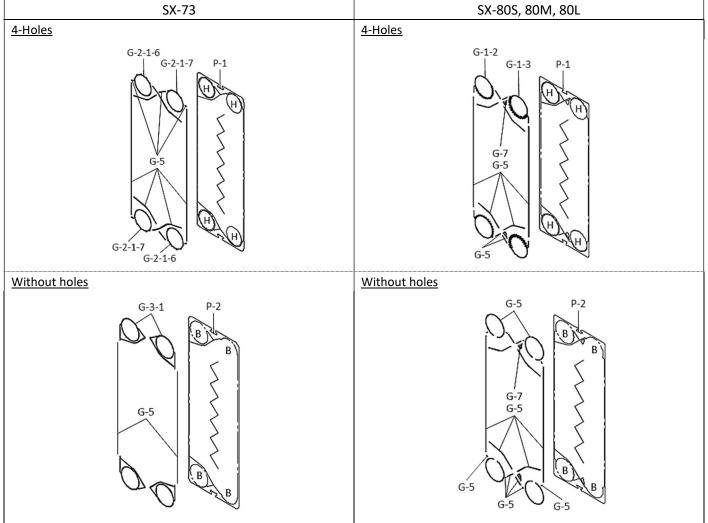

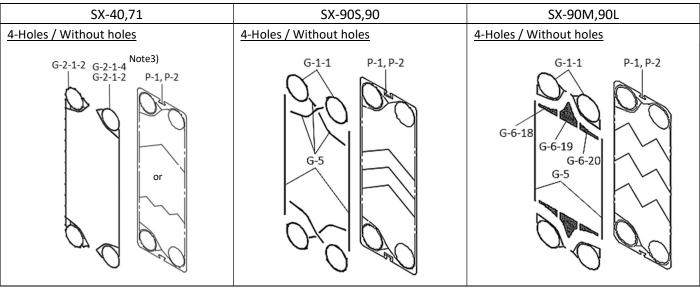

H:Hole B:Blind


P-1	PLATE (4-HOLES)			
P-2	PLATE (WITHOUT HOLES)			
G-1-1	D GASKET			
G-1-2	DA GASKET			
G-1-3	DB GASKET			
G-2-1-2				
G-2-1-4				
G-2-1-5	PLATE GASKET (CUTTING)			
G-2-1-6				
G-2-1-7				
G-3-1	E GASKET			
G-3-5	E GASKET			
G-5	S DISTANCE Note4)			
G-6-18				
G-6-19	T DISTANCE			
G-6-20				
G-7	P DISTANCE			


Note2) D-Plate in the table above shows the case of A-Plate.


Note3) In the case of "Glued" type gaskets, "G-2-1-2" is attached.

In the case of "Slit-In" type gaskets, "G-2-1-4" is attached.

Note4) For dimensions of G-5, refer to "3. S Distance (G-5) Dimension Table".

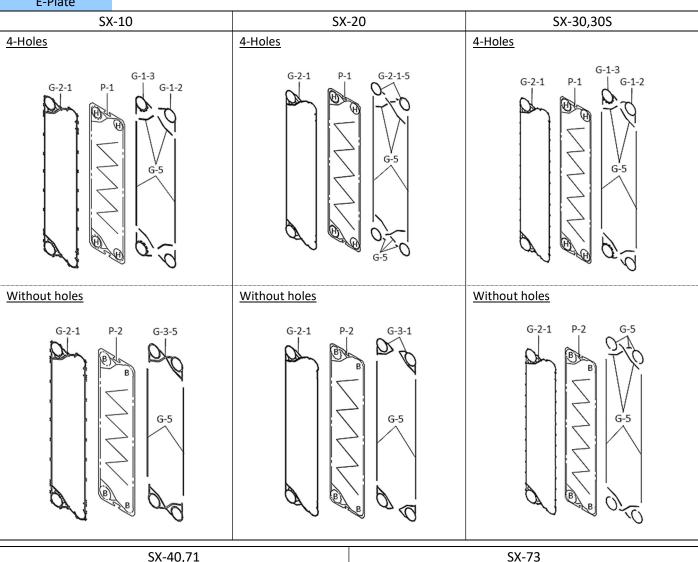

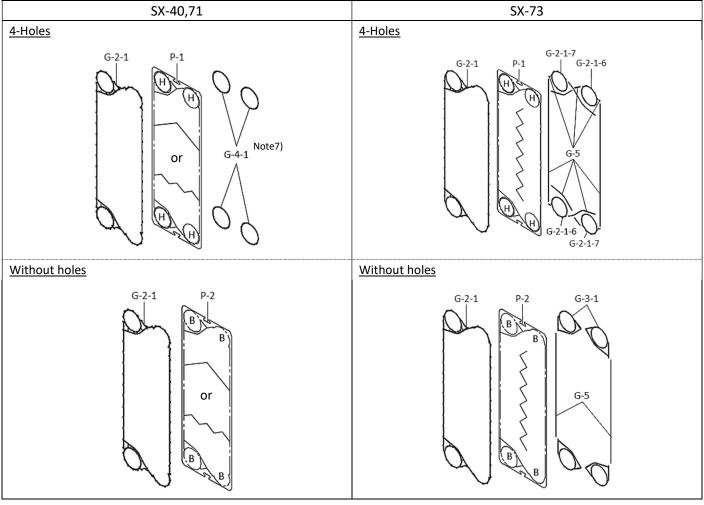

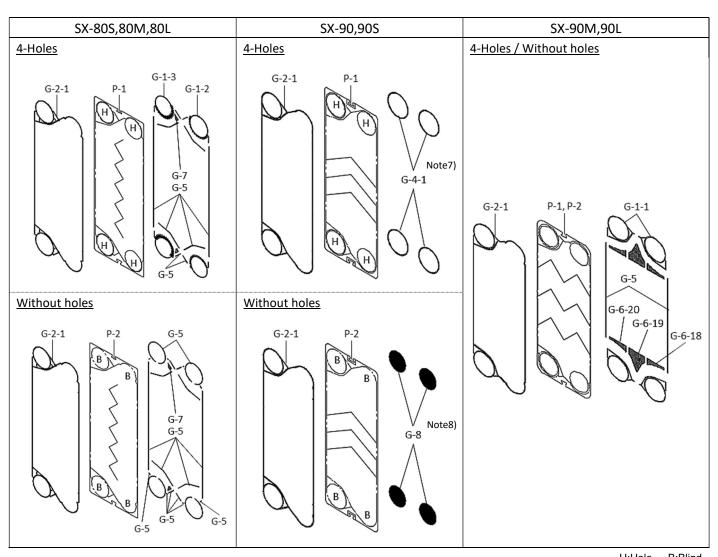

		H:Hole	B:Blind		
P-1	PLATE (4-HOLES)				
P-2	PLATE (WITHOUT HOLES)				
G-1-1	D GASKET				
G-1-2	DA GASKET				
G-1-3	DB GASKET				
G-2-1	PLATE GASKET				
G-2-1-5					
G-2-1-6	PLATE GASKET (CUTTING)				
G-2-1-7					
G-3-1	F CACKET				
G-3-5	E GASKET				
G-4-1	E NOZZLE GASKET				
G-5	S DISTANCE Note9)				
G-6-18					
G-6-19	T DISTANCE				
G-6-20					
G-7	P DISTANCE				
G-8	B DISTANCE				

Note5) E-Plate in the table above shows the case of A-Plate.

Note6) The figure shows a typical installation. The actual shape may differ depending on the model.

Note7) E-Nozzle gasket is no required when nozzle connection material is rubber covering.

Note8) In the case of cover plates on E-Frame port holes, B-Distance is no required.

Note9) For dimensions of G-5, refer to "3. S Distance (G-5) Dimension Table".

3. S Distance (G-5) Dimension Table

Model	D-Plate / E-Plate	Holes	Dimension [mm]	Number
		4-Holes	1020	2
SX-10	D-Plate / E-Plate		160	4
		Without holes	1020	2
			1450	2
			360	2
		4-Holes	300	2
SX-20	D-Plate / E-Plate		70	2
			30	4
		Without holes	1250	2
		4-Holes	1720	2
			290	4
			1960	2
SX-30	D-Plate / E-Plate		540	4
		Without holes	390	2
			280	2
			100	2
			1240	2
		4-Holes	290	4
			1500	2
SX-30S	D-Plate / E-Plate		540	4
	·	Without holes	390	2
			280	2
			100	2
SX-40		N	N/A	
SX-71			N/A	
			2000	2
			650	2
0.4.70		4-Holes	520	2
SX-73	D-Plate / E-Plate		130	
				2
			20	2
		Without holes	20 2000	
		Without holes		4
		Without holes 4-Holes	2000	4 2
			2000 1550	4 2 2
OV 202			2000 1550 800	4 2 2 4
SX-80S	D-Plate / E-Plate		2000 1550 800 150	4 2 2 4 4
SX-80S	D-Plate / E-Plate		2000 1550 800 150 1850	4 2 2 4 4 2
SX-80S	D-Plate / E-Plate	4-Holes	2000 1550 800 150 1850 800	4 2 2 4 4 2 4
SX-80S	D-Plate / E-Plate	4-Holes	2000 1550 800 150 1850 800 1400	4 2 2 4 4 2 4
SX-80S	D-Plate / E-Plate	4-Holes	2000 1550 800 150 1850 800 1400 150	4 2 2 4 4 2 4 4 4
SX-80S	D-Plate / E-Plate	4-Holes	2000 1550 800 150 1850 800 1400 150 40	4 2 2 4 4 2 4 4 4 8
SX-80S	D-Plate / E-Plate	4-Holes Without holes	2000 1550 800 150 1850 800 1400 150 40 2050	4 2 2 4 4 2 4 4 4 8 2
		4-Holes Without holes	2000 1550 800 150 1850 800 1400 150 40 2050 800	4 2 2 4 4 2 4 4 4 8 2
SX-80S SX-80M	D-Plate / E-Plate D-Plate / E-Plate	4-Holes Without holes	2000 1550 800 150 1850 800 1400 150 40 2050 800 150	4 2 2 4 4 4 4 4 8 2 4 4
		4-Holes Without holes	2000 1550 800 150 1850 800 1400 150 40 2050 800 150 2400	4 2 2 4 4 4 4 4 8 2 4 4 4 4 2
		4-Holes Without holes 4-Holes	2000 1550 800 150 1850 800 1400 150 40 2050 800 150 2400 800	4 2 2 4 4 4 2 4 4 8 2 4 4 4 2 4

	D-Plate / E-Plate	4-Holes	2700	2	
			800	4	
			150	4	
SX-80L			3000	2	
3X-00L			800	4	
		Without holes	1400	4	
			150	4	
			40	8	
			2180	2	
	D-Plate	4-Holes / Without holes	780	2	
SX-90			630	2	
			150	2	
	E-Plate	N/A			
	D-Plate		1600	2	
		4-Holes / Without holes	780	2	
SX-90S			630	2	
			150	2	
	E-Plate	N/A			
SX-90M	D-Plate / E-Plate	4-Holes / Without holes	1730	2	
SX-90L	D-Plate / E-Plate	4-Holes / Without holes	2030	2	
O/\-30L	D Hate / E Hate	4 Holes / Without Holes	2030		

Note10) Cut according to the dimensions in the table, and attach according to the figure in "2. Type and name of heat transfer plate and gasket."

Note11) Notation is a representative dimension. Please install the small parts according to the actual product.

Note12) For other product information and inquiries, please refer to our website and "2 Operation and Maintenance Manual".

(HP:https://www.hisaka.co.jp/)