



HISAKA "pH Control System"

- Control Device (HAC) simultaneously controls pH and Temp.
- Control Device (HAC) contributes to reproductivity improvement of Nylon Acid Dyeing which highly depends on pH condition.

System Overview

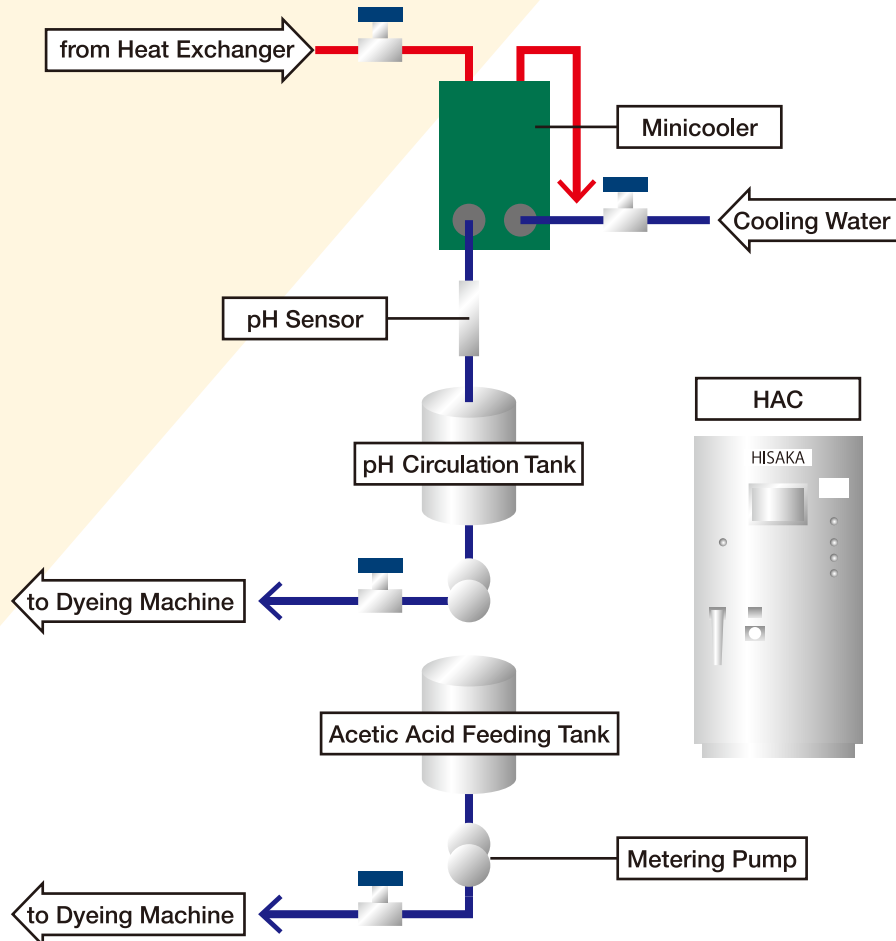

Control Device (HAC) controls pH value with continuously detecting the current pH value. The feeding volume and speed of Acetic Acid are controlled by Metering Pump.

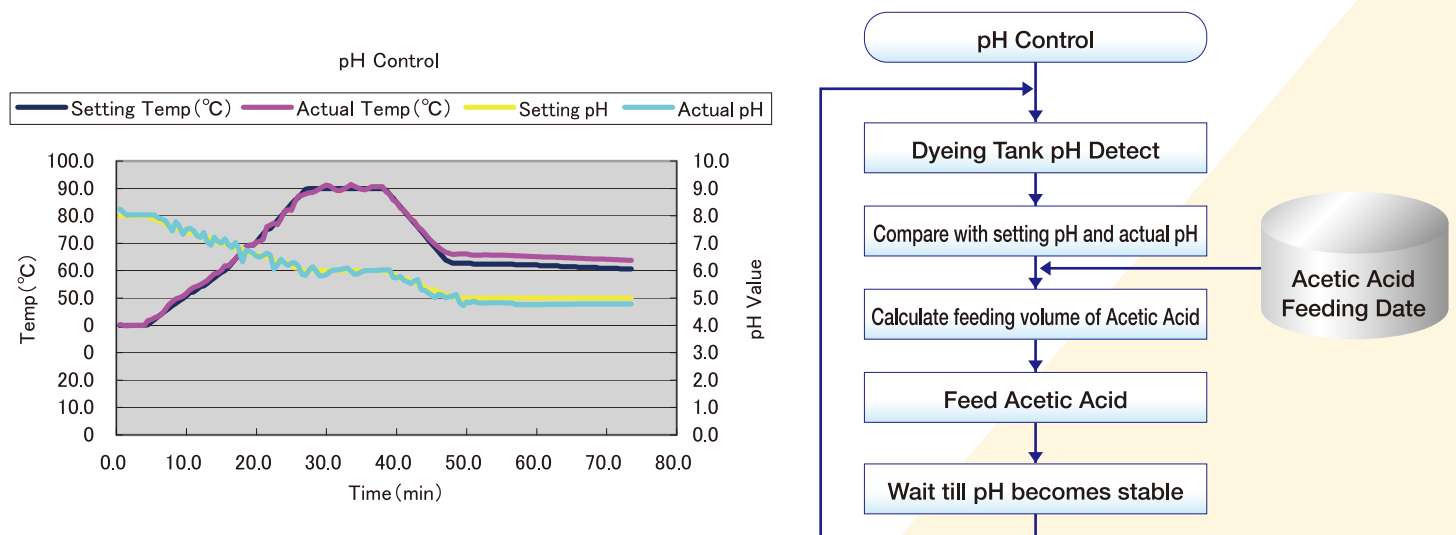

HISAKA WORKS, LTD. Process Engineering Division

Dyeing & Finishing Machinery / Osaka Branch office: 2-1-48, Higashi-konoike-cho, Higashi-Osaka City, Osaka 578-0973 Japan TEL : +81-72-966-9631 FAX : +81-72-966-9632
<http://www.hisaka.co.jp/english/textile/>